PANZERI

Gonio

Data sheet

SYSTEM POWER CONSUMPTION

CODE

EFFICACY

LIGHT SOURCE

LIGHT SOURCE LIFETIME

COLOUR TEMPERATURE

ELECTRICAL CONFIGURATION

NOMINAL LUMINOUS FLUX

LIGHT DISTRIBUTION

POWER SUPPLY

LUMEN OUTPUT

PROTECTION DEGREE

COLOUR TOLLERANCES

PACKING DIMENSIONS

EFFICIENCY

WEIGHT

FREQUENCY

DRIVER

220-240V AC dimmable (DALI/Push DIM) A01901.030.0502

A01901.030.0502

L70 (B50) 72.000h

2700K Ra>90

asymmetric

220-240V AC

dimmable (DALI/Push DIM)

integrated included

50/60Hz

3120lm

2168lm

69.5%

1.08 Kg

SDCM 3


19.5 x 35.0 x 10.0 cm

IP40

24W


LED

90.33lm/W

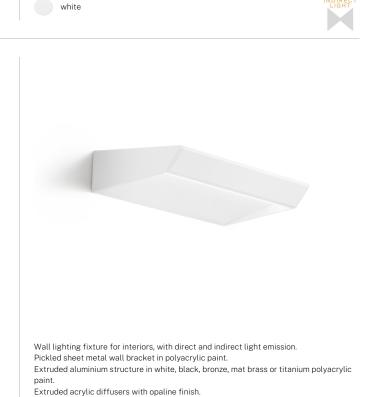


CE ERE 🗵

Technical drawing



Polar diagram

Die-cast aluminium end caps in polyacrylic paint.



______ _____C0 - C180 - - - C90 - C270