

Gonio

220-240V AC dimmable (DALI/Push DIM)  
A01917.030.0402




Data sheet

|                          |                          |
|--------------------------|--------------------------|
| CODE                     | A01917.030.0402          |
| SYSTEM POWER CONSUMPTION | 24W                      |
| EFFICACY                 | 93.83lm/W                |
| LIGHT SOURCE             | LED                      |
| LIGHT SOURCE LIFETIME    | L70 (B50) 72.000h        |
| COLOUR TEMPERATURE       | 3000K Ra>90              |
| LIGHT DISTRIBUTION       | asymmetric               |
| POWER SUPPLY             | 220-240V AC              |
| FREQUENCY                | 50/60Hz                  |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER                   | integrated included      |
| NOMINAL LUMINOUS FLUX    | 3240lm                   |
| LUMEN OUTPUT             | 2252lm                   |
| EFFICIENCY               | 69.5%                    |
| WEIGHT                   | 1,08 Kg                  |
| PROTECTION DEGREE        | IP40                     |
| COLOUR TOLLERANCES       | SDCM 3                   |
| PACKING DIMENSIONS       | 19,5 x 35,0 x 10,0 cm    |



Wall lighting fixture for interiors, with direct and indirect light emission.  
Pickled sheet metal wall bracket in polyacrylic paint.  
Extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded acrylic diffusers with opaline finish.  
Die-cast aluminium end caps in polyacrylic paint.

Technical drawing

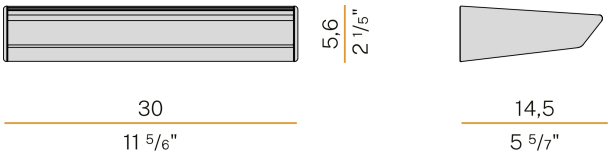

Polar diagram

