

PANZERI

Zero Line

220-240V AC dimmable (DALI/Push DIM)

A03622.100.0502




Data sheet

CODE	A03622.100.0502
SYSTEM POWER CONSUMPTION	22,2W
EFFICACY	71.45lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2896lm
LUMEN OUTPUT	1572lm
EFFICIENCY	54.3%
WEIGHT	1,58 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	10,0 x 105,0 x 5,0 cm



Ceiling or wall lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or in polished stainless steel. Specular aluminium reflector. Cover in brass with white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or with galvanic chrome plating. Extruded polycarbonate diffuser with opaline finish.

Technical drawing

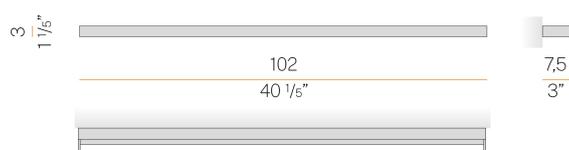

Application



Polar diagram

