

Cross

220-240V AC dimmable (DALI/Push DIM)
A04919.030.0102

 brushed brass




Data sheet

CODE	A04919.030.0102
SYSTEM POWER CONSUMPTION	20W
EFFICACY	117lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>80
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3000lm
LUMEN OUTPUT	2340lm
EFFICIENCY	78%
WEIGHT	1,22 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM <4
PACKING DIMENSIONS	22,0 x 35,0 x 27,0 cm



Wall lighting fixture for interiors, with direct and indirect light emission.
Pickled sheet metal structure in polyacrylic paint.
Pickled sheet metal cover in white or mat brass polyacrylic paint, or with gold leaf coating.
Diffuser in modelled frosted glass.

Technical drawing

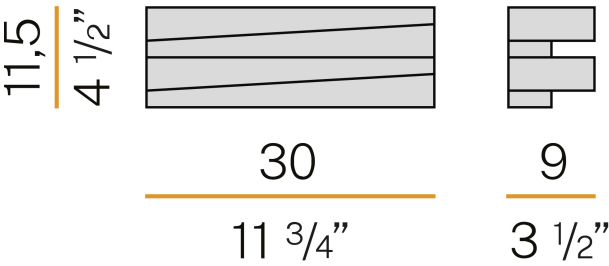

Polar diagram

