PANZERI

Opuntia

220-240V AC DIM-to-warm + tunable white
A06830.180.9121

brushed titanium

DIRECT LIGHT


Data sheet

CODE	A06830.180.9121
SYSTEM POWER CONSUMPTION	8,5W
EFFICACY	87.5lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2200-4000K Ra>90
LIGHT DISTRIBUTION	adjustable
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	DIM-to-warm + tunable white
DRIVER	integrated included
LUMEN OUTPUT	700lm
WEIGHT	1,29 Kg
PROTECTION DEGREE	IP40
PACKING DIMENSIONS	24,0 x 176,0 x 11,0 cm



Wall lighting fixture for interiors, with swivelling light beam.
Pickled sheet metal wall bracket in polyacrylic paint.
Pickled sheet metal wall plate in polyacrylic paint.
Extruded aluminium frame in white, mat black, bronze, mat brass or titanium polyacrylic paint.
Die-cast aluminium joints in polyacrylic paint.
Steel wire rope sling.
Die-cast aluminium head rotating on two axes in polyacrylic paint.
Modelled polycarbonate diffuser with opaline finish and serigraphy.
Push-button to adjust luminosity and light shade according to 5 levels of visual comfort.

Technical drawing

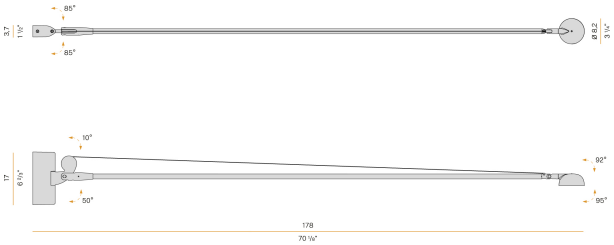

Polar diagram

