


Tubino

220-240V AC ON-OFF  
A07330.001.0401




Data sheet

|                          |                       |
|--------------------------|-----------------------|
| CODE                     | A07330.001.0401       |
| SYSTEM POWER CONSUMPTION | 6,5W                  |
| EFFICACY                 | 56.5lm/W              |
| LIGHT SOURCE             | LED                   |
| LIGHT SOURCE LIFETIME    | L70 (B50) 80.000h     |
| COLOUR TEMPERATURE       | 3000K Ra>90           |
| LIGHT DISTRIBUTION       | adjustable            |
| POWER SUPPLY             | 220-240V AC           |
| FREQUENCY                | 50/60Hz               |
| ELECTRICAL CONFIGURATION | ON-OFF                |
| DRIVER                   | integrated included   |
| NOMINAL LUMINOUS FLUX    | 475lm                 |
| LUMEN OUTPUT             | 339lm                 |
| EFFICIENCY               | 71.4%                 |
| WEIGHT                   | 0,62 Kg               |
| PROTECTION DEGREE        | IP20                  |
| COLOUR TOLLERANCES       | SDCM 3                |
| PACKING DIMENSIONS       | 29,0 x 24,0 x 14,0 cm |



Ceiling or wall lighting fixture for interiors, with swivelling light beam.  
Galvanized sheet metal ceiling or wall bracket.  
Die-cast aluminium wall plate in white, champagne, mat black, bronze or titanium polyacrylic paint.  
Turned brass joints in polyacrylic paint.  
Turned aluminium structure in polyacrylic paint.  
Turned aluminium head rotating on two axes in polyacrylic paint.  
Modelled polycarbonate diffuser with opaline finish.  
Turned brass end cap in polyacrylic paint.

Technical drawing

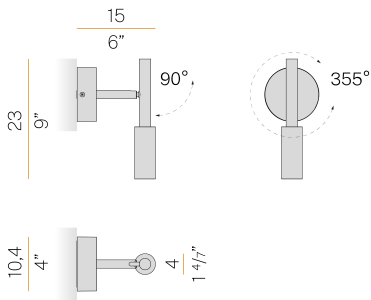

Application



Polar diagram

