


PANZERI

Hilow Line

220-240V AC dimmable (DALI/Push DIM)

A11019.100.0502

 matte brass


INDIRECT
LIGHT

Data sheet


CODE	A11019.100.0502
SYSTEM POWER CONSUMPTION	17W
EFFICACY	59.88lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B10) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1512lm
LUMEN OUTPUT	1018lm
EFFICIENCY	67.3%
WEIGHT	1,16 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12.0 x 106.0 x 7.0 cm



Technical drawing

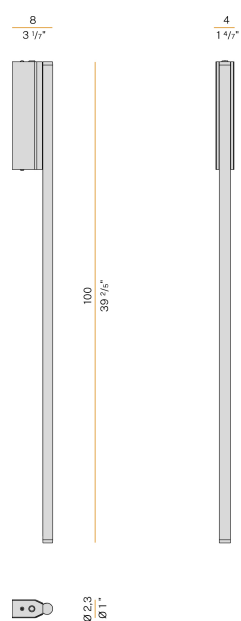

Polar diagram

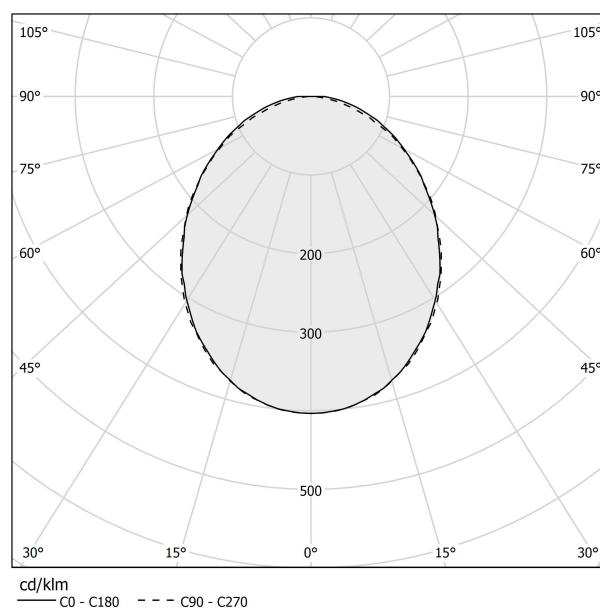

PANZERI

Hilow Line

Accessories / power supply

YCI11002.400

4m (157,5") long power cable with foot switch and plug.

