


# PANZERI

## Hilow Line

220-240V AC dimmable (DALI/Push DIM)

A11019.100.0502

 mat brass



### Data sheet


CODE	A11019.100.0502
SYSTEM POWER CONSUMPTION	17W
EFFICACY	59.88lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B10) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1512lm
LUMEN OUTPUT	1018lm
EFFICIENCY	67.3%
WEIGHT	1,16 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,0 x 106,0 x 7,0 cm



Wall lighting fixture for interiors, with indirect light emission.  
Pickled sheet metal wall bracket in polyacrylic paint.  
Pickled sheet metal wall plate in polyacrylic paint.  
Extruded aluminium structure in white, mat black, bronze, mat brass or titanium polyacrylic paint.  
Die-cast aluminium end caps in polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.



### Technical drawing

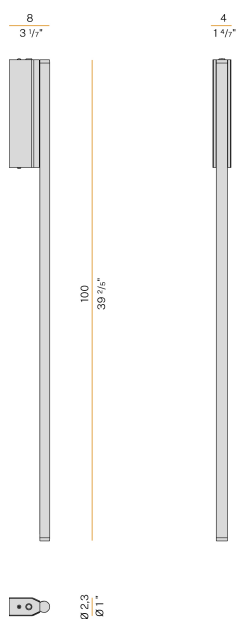

# PANZERI

## Hilow Line

### Accessories / power supply

---

YCI11002.400

4m (157,5") long power cable with foot switch and plug.

