

PANZERI

Giano

220-240V AC dimmable (DALI/Push DIM)

A24648.100.0402

 black/opal screen




Data sheet

| | |
|--------------------------|--------------------------|
| CODE | A24648.100.0402 |
| SYSTEM POWER CONSUMPTION | 36W |
| EFFICACY | 68.22lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L80 (B20) 60.000h |
| COLOUR TEMPERATURE | 3000K Ra>90 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 4560lm |
| LUMEN OUTPUT | 2456lm |
| EFFICIENCY | 53.9% |
| WEIGHT | 2,64 Kg |
| PROTECTION DEGREE | IP40 |
| COLOUR TOLLERANCES | SDCM 3 |
| PACKING DIMENSIONS | 14,0 x 141,0 x 14,0 cm |



Wall lighting fixture for interiors, with direct and indirect light emission. Extruded aluminium structure in RAL 9003 white or black powder paint. Extruded polycarbonate diffusers with opaline finish. Pickled sheet metal end caps in polyacrylic paint.

Technical drawing

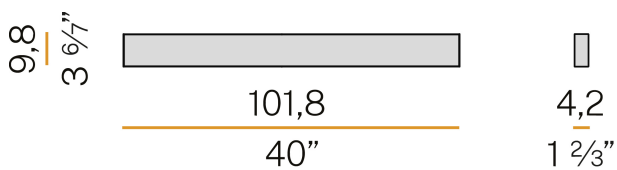

Polar diagram

