

Street Spot

48V DC dimmable (DALI)
B42002.030.2519




Data sheet

CODE	B42002.030.2519
SYSTEM POWER CONSUMPTION	4,9W
EFFICACY	79.5lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	flood
BEAM ANGLE	34°
POWER SUPPLY	48V DC
ELECTRICAL CONFIGURATION	dimmable (DALI)
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	440lm
LUMEN OUTPUT	318lm
EFFICIENCY	72.3%
WEIGHT	0,03 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Linear LED module for 48V low voltage electrified track, for ceiling/wall, suspended or recessed applications.
Blackpolyamide body, 34° beam polycarbonate lens and plastic cover.
Available in 2700K and 3000K.
Possibility of dimming with DALI protocol.

Technical drawing

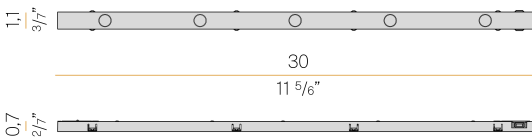

Application



Polar diagram

PANZERI

Street Spot

Accessories / electrified tracks

9600-1/B-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, black, 2000mm (78,7") long.	
   		
9600-1/B-ST5	Recessed 48V DC DALI electrified track, 2000mm (78,7") long.	
   		
9600-1/J-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 2000mm (78,7") long.	
   		
9600-2/B-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, black, 2000mm (78,7") long.	
   		
9600-2/B-ST5	Recessed 48V DC DALI electrified track, 2000mm (78,7") long.	
   		
9600-2/J-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 2000mm (78,7") long.	
   		
9600-3/B-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, black, 2000mm (78,7") long.	
   		
9600-3/B-ST5	Recessed 48V DC DALI electrified track, 2000mm (78,7") long.	
   		
9600-3/J-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 2000mm (78,7") long.	
   		

Street Spot

Accessories / electrified tracks

9600-R05-90/B-ST1

90° curve for suspended or ceiling-mounted 48V DC DALI electrified track, black, 500mm (19.7") radius.



9600-R05-90/J-ST1

90° curve for suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 500mm (19.7") radius.



PANZERI

Street Spot

Accessories / electrified tracks / power supply


YBE41902.DV1

Integrated 50W on/off power supply for electrified 48V track, with 2 additional cables for DALI feed-through wiring, black.




YDV.048.075.A01

LED driver, 75W 48V DC, on/off.



YDV.048.150.A01

LED driver, 150W 48V DC, on/off.



PANZERI

Street Spot

Accessories / electrified tracks / power supply and closing

9601-E/B Head power supply for 48V DC DALI electrified track, black.



9601-E/W Head power supply for 48V DC DALI electrified track, white.



9601-S/B Integrated head power supply for 48V DC DALI electrified track, with 2500mm long power cable, black.



Street Spot

Accessories / electrified tracks / closing

9604/ST1-B End cap for 48V DC electrified track, black.



9604/ST1-W End cap for 48V DC electrified track, white.



9604/ST5-B End cap for recessed 48V DC electrified track.



S-9600/B-E-3000 Aesthetic cover for recessed 48V DC electrified track, lenght 3000mm (118,1"), black.



S-9600/B-E1-3000 Aesthetic cover for 48V DC electrified track, lenght 3000mm (118,1"), black.



Accessories / electrified tracks / fixing

YKS41900.01

Suspension kit with 2000mm (78,7") long steel wire and regulator, for electrified track, one every 450mm.



Street Spot

Accessories / electrified tracks / junction

9603/B Linear electrified joint for 48V DC DALI track, black.



9605-O/B L-shaped junction cover for ceiling-mounted 48V DC electrified track, black.



9605-O/W L-shaped junction cover for ceiling-mounted 48V DC electrified track, white.



9605-V/B L-shaped junction cover for wall-ceiling corner for ceiling-mounted 48V DC electrified track, black.



9605-V/W L-shaped junction cover for wall-ceiling corner for ceiling-mounted 48V DC electrified track, white.



9611/B Electrified "L" joint for 48V DC DALI track, black.



9618-S/B Flexible electrified joint for 48V DC DALI track, black.



YRS.B048.A16

Repeater device for opto-isolating the data bus, for 48V DC DALI electrified track.

