

Street Line

48V DC dimmable (DALI)
B42102.060.0419



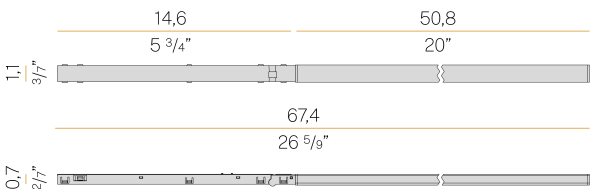
Data sheet

CODE	B42102.060.0419
SYSTEM POWER CONSUMPTION	7,4W
EFFICACY	61.29lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	48V DC
ELECTRICAL CONFIGURATION	dimmable (DALI)
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	900lm
LUMEN OUTPUT	429lm
EFFICIENCY	47.7%
WEIGHT	0,04 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Linear diffused LED module for 48V low voltage electrified track, for ceiling/wall, suspended or recessed applications, with black polyamide body and opal polycarbonate screen.
Available in 2700K and 3000K.
Possibility of dimming with DALI protocol.

Technical drawing



Application



Polar diagram

PANZERI

Street Line

Accessories / electrified tracks

9600-1/B-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, black, 2000mm (78,7") long.	
   		
9600-1/B-ST5	Recessed 48V DC DALI electrified track, 2000mm (78,7") long.	
   		
9600-1/J-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 2000mm (78,7") long.	
   		
9600-2/B-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, black, 2000mm (78,7") long.	
   		
9600-2/B-ST5	Recessed 48V DC DALI electrified track, 2000mm (78,7") long.	
   		
9600-2/J-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 2000mm (78,7") long.	
   		
9600-3/B-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, black, 2000mm (78,7") long.	
   		
9600-3/B-ST5	Recessed 48V DC DALI electrified track, 2000mm (78,7") long.	
   		
9600-3/J-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 2000mm (78,7") long.	
   		

PANZERI

Street Line

Accessories / electrified tracks

9600-R05-90/B-ST1

90° curve for suspended or ceiling-mounted 48V DC DALI electrified track, black, 500mm (19.7") radius.





9600-R05-90/J-ST1

90° curve for suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 500mm (19.7") radius.



Street Line

Accessories / electrified tracks / power supply

YBE41902.DV1	Integrated 50W on/off power supply for electrified 48V track, with 2 additional cables for DALI feed-through wiring, black.	
   		
YDV.048.075.A01	LED driver, 75W 48V DC, on/off.	
   		
YDV.048.150.A01	LED driver, 150W 48V DC, on/off.	
   		

PANZERI

Street Line

Accessories / electrified tracks / power supply and closing

9601-E/B Head power supply for 48V DC DALI electrified track, black.



9601-E/W Head power supply for 48V DC DALI electrified track, white.



9601-S/B Integrated head power supply for 48V DC DALI electrified track, with 2500mm long power cable, black.



Street Line

Accessories / electrified tracks / closing

9604/ST1-B End cap for 48V DC electrified track, black.



9604/ST1-W End cap for 48V DC electrified track, white.



9604/ST5-B End cap for recessed 48V DC electrified track.



S-9600/B-E-3000 Aesthetic cover for recessed 48V DC electrified track, lenght 3000mm (118,1"), black.



S-9600/B-E1-3000 Aesthetic cover for 48V DC electrified track, lenght 3000mm (118,1"), black.



Accessories / electrified tracks / fixing

YKS41900.01

Suspension kit with 2000mm (78,7") long steel wire and regulator, for electrified track, one every 450mm.



Street Line

Accessories / electrified tracks / junction

9603/B Linear electrified joint for 48V DC DALI track, black.



9605-O/B L-shaped junction cover for ceiling-mounted 48V DC electrified track, black.



9605-O/W L-shaped junction cover for ceiling-mounted 48V DC electrified track, white.



9605-V/B L-shaped junction cover for wall-ceiling corner for ceiling-mounted 48V DC electrified track, black.



9605-V/W L-shaped junction cover for wall-ceiling corner for ceiling-mounted 48V DC electrified track, white.



9611/B Electrified "L" joint for 48V DC DALI track, black.



9618-S/B Flexible electrified joint for 48V DC DALI track, black.



YRS.B048.A16

Repeater device for opto-isolating the data bus, for 48V DC DALI electrified track.

