

Street Line

48V DC dimmable (DALI)
B42102.060.0519




Data sheet

CODE	B42102.060.0519
SYSTEM POWER CONSUMPTION	7,4W
EFFICACY	61.29lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	48V DC
ELECTRICAL CONFIGURATION	dimmable (DALI)
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	900lm
LUMEN OUTPUT	429lm
EFFICIENCY	47.7%
WEIGHT	0,04 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Linear diffused LED module for 48V low voltage electrified track, for ceiling/wall, suspended or recessed applications, with black polyamide body and opal polycarbonate screen.
Available in 2700K and 3000K.
Possibility of dimming with DALI protocol.

Technical drawing

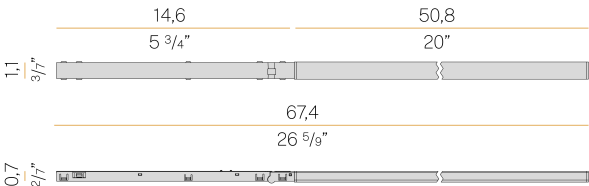

Application



Polar diagram