


Street 3

48V DC dimmable (DALI)
B42219.003.2519




Data sheet

CODE	B42219.003.2519
SYSTEM POWER CONSUMPTION	7,2W
EFFICACY	63.86lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	adjustable
BEAM ANGLE	24°
POWER SUPPLY	48V DC
ELECTRICAL CONFIGURATION	dimmable (DALI)
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	550lm
LUMEN OUTPUT	447lm
EFFICIENCY	81.3%
WEIGHT	0,33 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Lighting fixture for electrified track for interiors, with swivelling light beam.
Die-cast aluminium joint and double-axes rotating structure.
Thermoplastic anti-glare snoot and medium-beam lens.
Equipped with electric and mechanical adapter for 48V low voltage electrified tracks.
Available in 2700K and 3000K version, in white, black, mat brass, bronze and titanium finishes, with with black arm and back cover.

Technical drawing

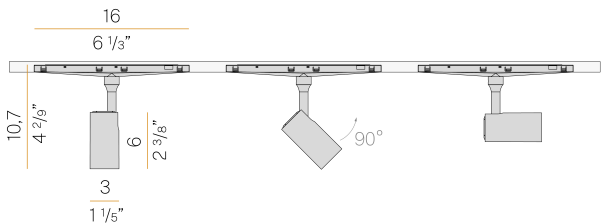

Application

