PANZERI

Soho Line

48V DC ON-OFF
B47001.090.0416

white

DIRECT LIGHT

Data sheet

CODE	B47001.090.0416
SYSTEM POWER CONSUMPTION	19W
EFFICACY	65.47lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	48V DC
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	2068lm
LUMEN OUTPUT	1244lm
EFFICIENCY	60.2%
WEIGHT	0,30 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	18,0 x 60,0 x 12,0 cm

Linear lighting module for electrified track for interiors, with direct light emission.
Structure in anodized extruded aluminium.
Extruded polycarbonate diffuser with opaline finish.
End caps in black thermoplastic material with fixing system for 48V low voltage electrified tracks.

Technical drawing

Application

Polar diagram

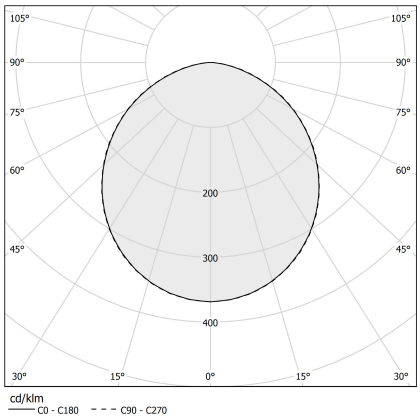

PANZERI

Soho Line

Accessories / electrified tracks

XM44501-100

Electrified track for suspended or ceiling installation for interiors. Structure in extruded aluminium with white or black powder paint. 48V DC low voltage power supply. 15A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 1m (39,4")



XM44501-200

Electrified track for suspended or ceiling installation for interiors. Structure in extruded aluminium with white or black powder paint. 48V DC low voltage power supply. 15A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 2m (78,7")



XM44501-300

Electrified track for suspended or ceiling installation for interiors. Structure in extruded aluminium with white or black powder paint. 48V DC low voltage power supply. 15A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 3m (118,1")



XM44602-100

Electrified track for ceiling or wall built-in installation for interiors. Total built-in structure in plasterboard, in extruded aluminium with black powder paint. 48V DC low voltage power supply. 15A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 1m (39,4")



XM44602-200

Electrified track for ceiling or wall built-in installation for interiors. Total built-in structure in plasterboard, in extruded aluminium with black powder paint. 48V DC low voltage power supply. 15A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 2m (78,7")



XM44602-300

Electrified track for ceiling or wall built-in installation for interiors. Total built-in structure in plasterboard, in extruded aluminium with black powder paint. 48V DC low voltage power supply. 15A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 3m (118,1")



PANZERI

Soho Line

Accessories / electrified tracks / power supply

YDV.048.075.A01

LED driver, 75W 48V DC, on/off.



YDV.048.150.A01

LED driver, 150W 48V DC, on/off.



Soho Line

Accessories / electrified tracks / power supply and closing

XM44501-ADX

Right live-end for 48V DC suspended or ceiling electrified track.

XM44501-ASX

Left live-end for 48V DC suspended or ceiling electrified track.

XM44602-ADX

Right live-end for 48V DC recessed electrified track.



XM44602-ASX

Left live-end for 48V DC recessed electrified track.



Accessories / electrified tracks / power supply and junction

XM44501-A

Central connector for 48V DC suspended or ceiling electrified track.



XM44602-A

Central connector for 48V DC recessed electrified track.

Accessories / electrified tracks / closing

XM44501-C

Cover 1000mm (39,4") long for 48V DC electrified track.

XM44501-E

End cap for 48V DC suspended or ceiling electrified track.



XM44502-C

Cover 1000mm (39,4") long for 48V DC electrified track.

XM44602-E

End cap for 48V DC recessed electrified track.

Soho Line

Accessories / electrified tracks / fixing

XM44501-K

Ceiling kit for 48V DC electrified track.



XM44501-S

Suspension kit with 2m (78,7") long steel wire and plate for 48V DC electrified track.



XM446-P

Plate for fixing ceiling pendants for 48V DC recessed electrified track.

Soho Line

Accessories / electrified tracks / junction

XM44501-LE

External "L" joint for 48V DC suspended or ceiling electrified track.

XM44501-LI

Internal "L" joint for 48V DC suspended or ceiling electrified track.

XM44501-UE

Straight joint for 48V DC electrified track.

XM44501-UM

Mechanical straight joint for 48V DC electrified track.

XM44502-UE

Straight joint for 48V DC electrified track.

XM44502-UM

Mechanical straight joint for 48V DC electrified track.