


PANZERI

Jackie

220-240V AC dimmable (Step DIM)

C07719.000.0409P

 mat brass

DIRECT
LIGHT


Data sheet

| | |
|--------------------------|-----------------------|
| CODE | C07719.000.0409P |
| SYSTEM POWER CONSUMPTION | 10W |
| EFFICACY | 70.6lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L90 (B10) 50.000h |
| COLOUR TEMPERATURE | 3000K Ra>90 |
| LIGHT DISTRIBUTION | adjustable |
| BEAM ANGLE | 90° |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | dimmable (Step DIM) |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 884lm |
| LUMEN OUTPUT | 706lm |
| EFFICIENCY | 79.9% |
| WEIGHT | 4,10 Kg |
| PROTECTION DEGREE | IP40 |
| COLOUR TOLLERANCES | SDCM 3 |
| PACKING DIMENSIONS | 25,0 x 119,0 x 6,0 cm |



Table lighting fixture for interiors, with swivelling light beam.
 Pickled sheet metal bearing base in polyacrylic paint.
 Extruded aluminium frame in white, black, red, mat brass or titanium polyacrylic paint.
 Die-cast aluminium joints in polyacrylic paint.
 Steel wire rope slings.
 Die-cast aluminium head rotating on two axes in polyacrylic paint.
 Modelled acrylic diffuser with mat finish and double serigraphy.
 Push-button to adjust luminosity according to 5 levels of visual comfort.
 Integrated presence detector.
 Equipped with a 1,6m (63") long power cable with jack connector and adapter plug.

Technical drawing

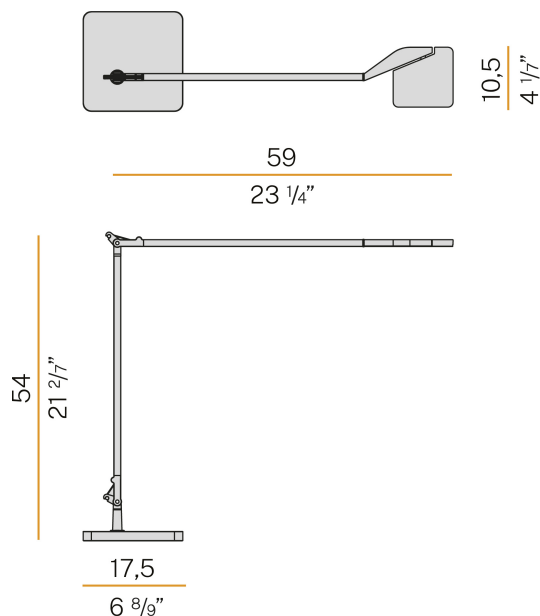

Polar diagram

