

Firefly In The Sky

5V DC battery
C07817.011.0514



Data sheet

CODE	C07817.011.0514
SYSTEM POWER CONSUMPTION	2W
EFFICACY	67lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 70.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	5V DC
ELECTRICAL CONFIGURATION	battery
NOMINAL LUMINOUS FLUX	273lm
LUMEN OUTPUT	134lm
EFFICIENCY	49.1%
WEIGHT	1,06 Kg
PROTECTION DEGREE	IP65
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	13,5 x 21,0 x 33,0 cm






Table lighting fixture for indoor or outdoor spaces, with direct light emission. Die-cast aluminium bearing base in polyacrylic paint. Body in brass and aluminium in champagne, mat black, corten, bronze, textured olive green, textured soft white and textured natural terracotta polyacrylic paint. Removable head with magnetic fastening, in die-cast aluminium with polyacrylic paint. Silicone gaskets. Modelled acrylic diffuser with mat finish and serigraphy. Stainless steel screws. Push-button to adjust luminosity according to 5 levels of visual comfort. Battery status indicator integrated into the head. Equipped with Li-Po battery USB-C rechargeable, with up to 6 hours life at 100% of light emission and up to 24 hours life at 25%. Equipped with battery charger with USB-C connector and adapter plug.

Technical drawing

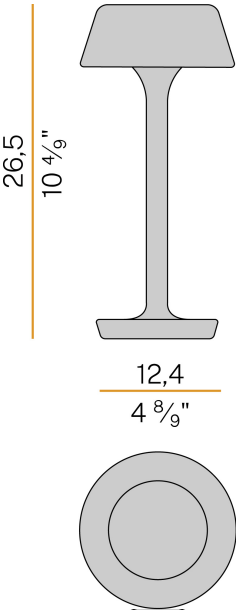

Polar diagram

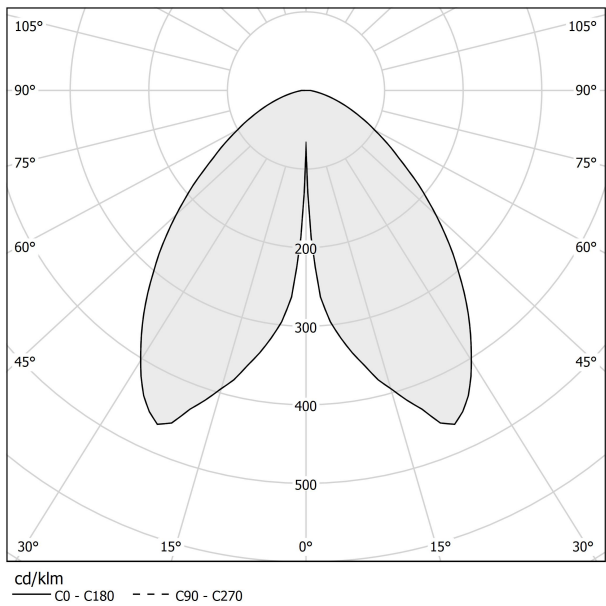

Accessories / charging

YRM07802.010

Multiple charging tray for up to 10 Firefly in the Sky models.

