

Coralys

24V DC 24V
EM14468.022.0410

shadow grey




Data sheet

CODE	EM14468.022.0410
SYSTEM POWER CONSUMPTION	6W
EFFICACY	100lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	850lm
LUMEN OUTPUT	600lm
EFFICIENCY	70.6%
WEIGHT	0,00 Kg
PROTECTION DEGREE	IP65
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Single suspension lamp for outdoor environments.
The shade structure is made of interlocking aluminium ribs and features a die-cast aluminium head.
The polycarbonate diffuser screen distributes light uniformly and softly through the slats of the structure.
The loose power and suspension cable allows the product to be powered individually or in clusters of multiple units.
A range of accessories for power supply and suspension is available.
Power supply not included, to be positioned remotely.

Technical drawing

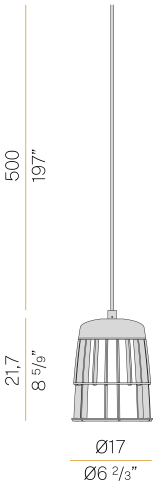

Polar diagram