

Scent Pixel

220-240V AC  
KRL07606.V17.001




Data sheet

|                          |                     |
|--------------------------|---------------------|
| CODE                     | KRL07606.V17.001    |
| SYSTEM POWER CONSUMPTION | 16W                 |
| EFFICACY                 | 0.31lm/W            |
| LIGHT SOURCE             | LED                 |
| LIGHT DISTRIBUTION       | flood               |
| POWER SUPPLY             | 220-240V AC         |
| FREQUENCY                | 50/60Hz             |
| DRIVER                   | integrated included |
| NOMINAL LUMINOUS FLUX    | 5x270lm             |
| LUMEN OUTPUT             | 5x181lm             |
| EFFICIENCY               | 100%                |
| WEIGHT                   | 0,00 Kg             |
| PROTECTION DEGREE        | IP20                |
| COLOUR TOLLERANCES       | SDCM 3              |
| PACKING DIMENSIONS       | 0,0 x 0,0 x 0,0 cm  |



Scent Pixel evolves the concept of punctual lighting into a system of pure creative freedom, transforming light from a single accent into a true architectural structure. The Pixel module strips away the superfluous to become rhythm and geometry: a discreet element that allows for the composition of luminous constellations capable of vibrating in space. Its precious soul, inspired by perfume bottles, reveals itself through the glass facets, which multiply into a creative narrative. It is an invitation to design not just the light, but the atmosphere itself, letting every installation become a diffuse and profound sensory story. Cluster version with linear 5-element ceiling canopy.

Technical drawing

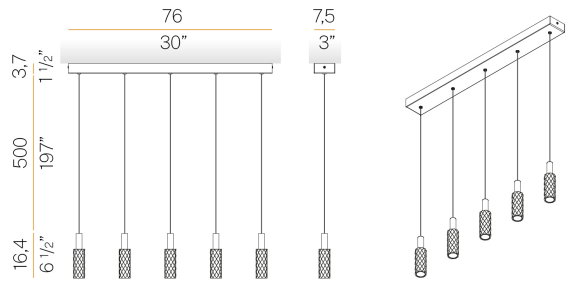

Polar diagram