


Auriel

220-240V AC ON-OFF  
KRL16406.120.003



Data sheet

|                          |                         |
|--------------------------|-------------------------|
| CODE                     | KRL16406.120.003        |
| SYSTEM POWER CONSUMPTION | 37W                     |
| EFFICACY                 | 0.16lm/W                |
| LIGHT SOURCE             | LED                     |
| LIGHT SOURCE LIFETIME    | L80 (B10) 50.000h       |
| COLOUR TEMPERATURE       | 2700/3000K programmable |
| LIGHT DISTRIBUTION       | diffused                |
| POWER SUPPLY             | 220-240V AC             |
| FREQUENCY                | 50/60Hz                 |
| ELECTRICAL CONFIGURATION | ON-OFF                  |
| DRIVER                   | integrated included     |
| NOMINAL LUMINOUS FLUX    | 6x600lm                 |
| LUMEN OUTPUT             | 6x400lm                 |
| EFFICIENCY               | 100%                    |
| WEIGHT                   | 0,00 Kg                 |
| PROTECTION DEGREE        | IP20                    |
| COLOUR TOLLERANCES       | SDCM 3                  |
| PACKING DIMENSIONS       | 0,0 x 0,0 x 0,0 cm      |

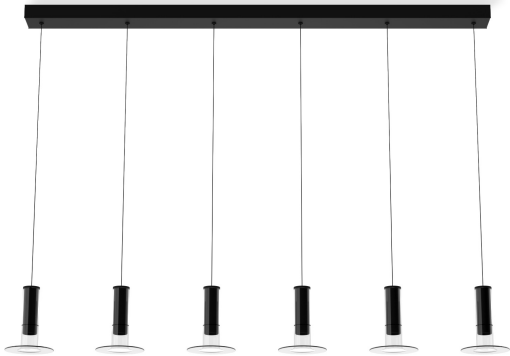

Linear cluster of 6 suspension elements for indoor environments, with transparent borosilicate glass lampshades and LED bodies in anodised machined solid aluminium. The recessed LED source allows the colour temperature to be set (2700K or 3000K) during installation and diffuses light through a polycarbonate diffuser screen. Linear ceiling rose for power supply and ceiling mounting painted in matt black, with black suspension cables.



Technical drawing

Polar diagram