



Auriel

220-240V AC dimmable (DALI/Push DIM)
KRL16406.120.004




Data sheet

CODE	KRL16406.120.004
SYSTEM POWER CONSUMPTION	37W
EFFICACY	0.16lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 50.000h
COLOUR TEMPERATURE	2700/3000K programmable
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	6x600lm
LUMEN OUTPUT	6x400lm
EFFICIENCY	100%
WEIGHT	0,00 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm

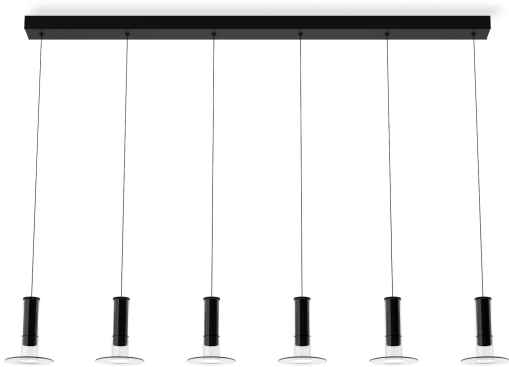

Linear cluster of 6 suspension elements for indoor environments, with transparent borosilicate glass lampshades and LED bodies in anodised machined solid aluminium. The recessed LED source allows the colour temperature to be set (2700K or 3000K) during installation and diffuses light through a polycarbonate diffuser screen. Linear ceiling rose for power supply and ceiling mounting painted in matt black, with black suspension cables.



Technical drawing

Polar diagram