

Viisi

220-240V AC dimmable (DALI/Push DIM)
L02002.210.0402




Data sheet

CODE	L02002.210.0402
SYSTEM POWER CONSUMPTION	44W
EFFICACY	54lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	5180lm
LUMEN OUTPUT	2376lm
EFFICIENCY	45.9%
WEIGHT	2,80 Kg
PROTECTION DEGREE	IP40
PACKING DIMENSIONS	14,0 x 224,0 x 14,0 cm



Suspension lighting fixture for interiors, with direct light emission.
Machined aluminium structure in white or black polyacrylic paint.
Anodized extruded aluminium heat sink.
Extruded polycarbonate diffuser with opaline finish.
Suspension kit with griplocks and 2m (78,7") long steel cables.
2,3m (90,6") long power cable in transparent PVC.
Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white or black polyacrylic paint.

Technical drawing

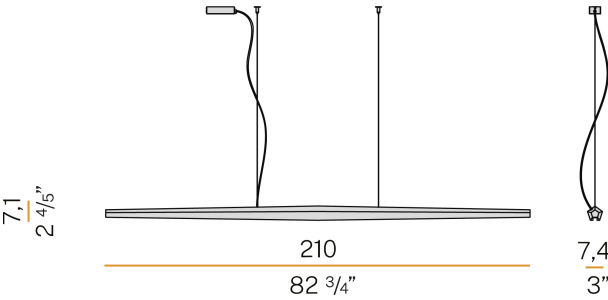

Polar diagram

