

# PANZERI

## To-be

220-240V AC ON-OFF  
L02617.065.0501




### Data sheet

CODE	L02617.065.0501
SYSTEM POWER CONSUMPTION	7W
EFFICACY	51.86lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	546lm
LUMEN OUTPUT	363lm
EFFICIENCY	66.5%
WEIGHT	0,74 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	5,0 x 105,0 x 10,0 cm



Suspension lighting fixture for interiors, with direct light emission.  
Extruded aluminium structure in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.  
Extruded aluminium heat sink.  
Modelled polycarbonate diffuser with opaline finish.  
Turned brass end cap in polyacrylic paint.  
2m (78,7") long suspension and power cable in transparent PVC.  
Power canopy with pickled sheet metal ceiling bracket and extruded aluminium covering in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.

### Technical drawing

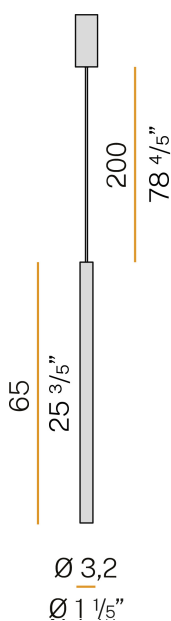

### Polar diagram

