


PANZERI

Arena Acoustic

220-240V AC dimmable (DALI/Push DIM)

L04619.100.0502

 matte brass

DIRECT
LIGHT


Data sheet

CODE	L04619.100.0502
SYSTEM POWER CONSUMPTION	37W
EFFICACY	38.76lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4792lm
LUMEN OUTPUT	1434lm
EFFICIENCY	29.9%
WEIGHT	5,86 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	107,0 x 107,0 x 11,0 cm



Suspension lighting fixture for interiors, with direct light emission.
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.
Sound absorbing PET panel in basalt colour with sound absorption Class C for reducing up to 70% of reverberated sound (NRC 0,7) and fire rating Group 1 ISO 9705.
Extruded polycarbonate diffuser with opaline finish.
5m (196,9") long steel suspension cables.
5m (196,9") long power cable in transparent PVC.
Power canopy with pickled sheet metal ceiling bracket and covering in white, black, bronze, mat brass or titanium polyacrylic paint.

Technical drawing

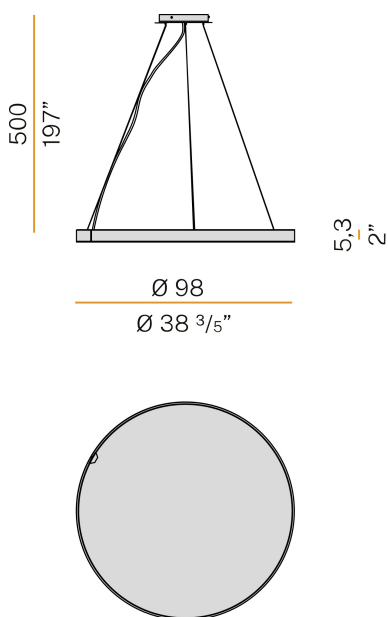

Polar diagram

