

# PANZERI

## Gilbert

220-240V AC dimmable (DALI/Push DIM)  
L06501.037.0402

white





### Data sheet

CODE	L06501.037.0402
SYSTEM POWER CONSUMPTION	27W
EFFICACY	93.52lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L90 (B10) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3157lm
LUMEN OUTPUT	2525lm
EFFICIENCY	80%
WEIGHT	3,80 Kg
PROTECTION DEGREE	IP20
COLOUR TOLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



### Technical drawing

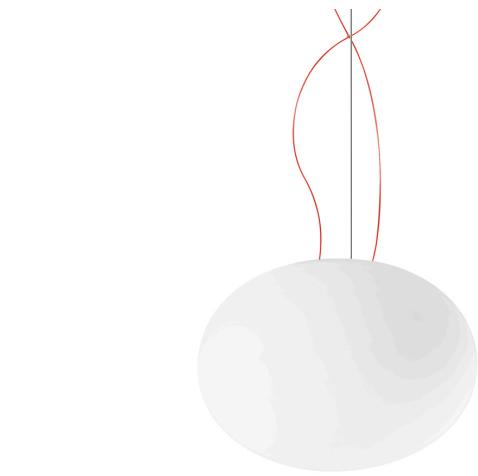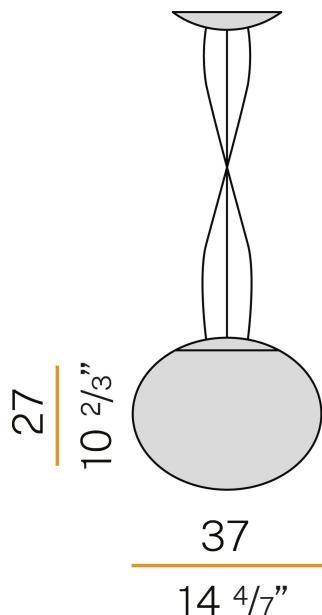

Suspension lighting fixture for interiors, with direct and indirect light emission.  
Pressed pickled sheet metal structure in white polyacrylic paint.  
Extruded aluminium heat sink.  
Diffuser in mat white blown glass.  
2m (78,7") long steel suspension cable.  
2m (78,7") long double power cable in red Teflon.  
Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal  
covering in white polyacrylic paint.

### Polar diagram

