

Willy Glass

220-240V AC dimmable (DALI/Push DIM)  
L07633.060.0402

● metallized grey




Data sheet

|                          |                          |
|--------------------------|--------------------------|
| CODE                     | L07633.060.0402          |
| SYSTEM POWER CONSUMPTION | 40W                      |
| EFFICACY                 | 89.68lm/W                |
| LIGHT SOURCE             | LED                      |
| COLOUR TEMPERATURE       | 3000K Ra>90              |
| LIGHT DISTRIBUTION       | diffused                 |
| POWER SUPPLY             | 220-240V AC              |
| FREQUENCY                | 50/60Hz                  |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER                   | integrated included      |
| NOMINAL LUMINOUS FLUX    | 4592lm                   |
| LUMEN OUTPUT             | 3587lm                   |
| EFFICIENCY               | 78.1%                    |
| WEIGHT                   | 8,38 Kg                  |
| PROTECTION DEGREE        | IP20                     |
| COLOUR TOLLERANCES       | SDCM 3                   |
| PACKING DIMENSIONS       | 69,0 x 69,0 x 53,0 cm    |



Suspension lighting fixture for interiors, with direct and indirect light emission. Turned pickled sheet metal structure in metallized grey polyacrylic paint. Extruded aluminium heat sink. Lampshade in mat white blown glass. Diffuser in modelled frosted glass. 2m (78,7") long steel suspension cables. 2,2m (86,6") long power cable in transparent PVC. Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in metallized grey polyacrylic paint.

Technical drawing

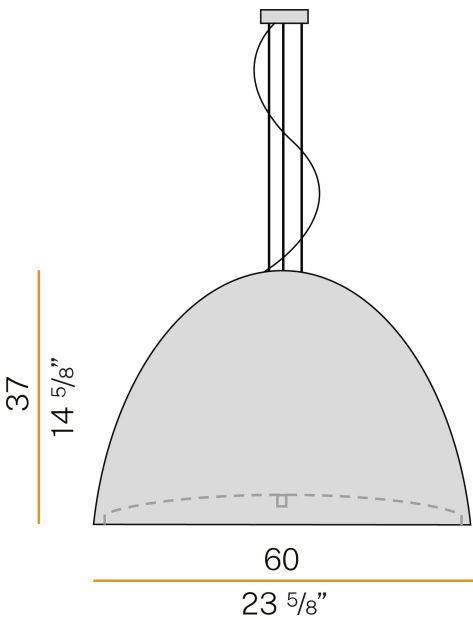

Polar diagram

