

# PANZERI

## Rendez-vous

220-240V AC ON-OFF

L08017.007.1701





### Data sheet

CODE	L08017.007.1701
SYSTEM POWER CONSUMPTION	2W
EFFICACY	55.5lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	flood
BEAM ANGLE	25°
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	120lm
LUMEN OUTPUT	111lm
EFFICIENCY	92.5%
WEIGHT	0,38 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,0 x 24,0 x 13,0 cm



### Technical drawing

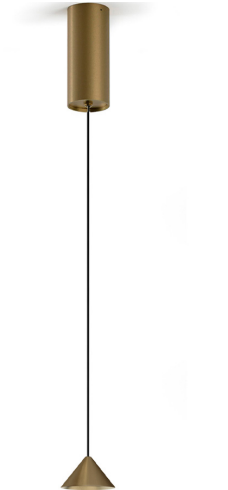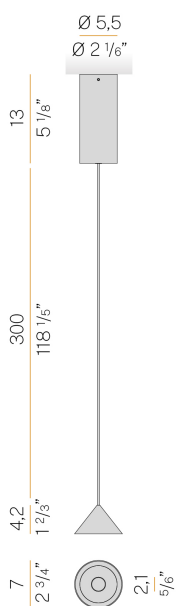

Suspension lighting fixture for interiors, with direct light emission. Die-cast aluminium head with polyacrylic paint finish in mat black or bronze. Turned aluminium end plate with polyacrylic paint in mat black or bronze. Black PVC coaxial suspension and power cable 3m (118.1") long. Feeding canopy with ceiling mounting bracket in pickled sheet metal and extruded aluminium housing with polyacrylic paint finish in mat black or bronze.

### Polar diagram

# PANZERI

## Rendez-vous

### Accessories / diffusion

KGA08017.54

Kit with anti-glare grid in black colour



YLN08000.42

Wide flood lens (42°)

