

# PANZERI

## Golden Ring

220-240V AC dimmable (DALI/Push DIM)


L08101.120.0402

● white




### Data sheet

CODE	L08101.120.0402
SYSTEM POWER CONSUMPTION	150W
EFFICACY	69.77lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	20955lm
LUMEN OUTPUT	10466lm
EFFICIENCY	49.9%
WEIGHT	15.59 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	135,0 x 25,0 x 135,0 cm

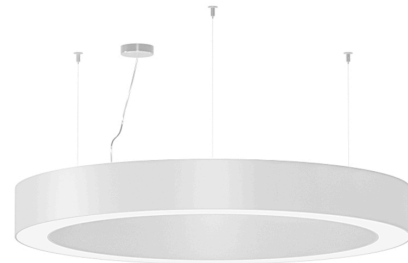


Suspension lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in polyacrylic paint. Aluminium dissipation plates. Aluminium and pickled sheet metal covers in white or black polyacrylic paint, or with gold leaf coating. Diffusers in modelled polycarbonate with opaline finish. Suspension kit with griplocks and 5m (196,9") long steel cables. 5m (196,9") long power cable in transparent PVC. Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white or black polyacrylic paint, or with gold leaf coating.

### Technical drawing

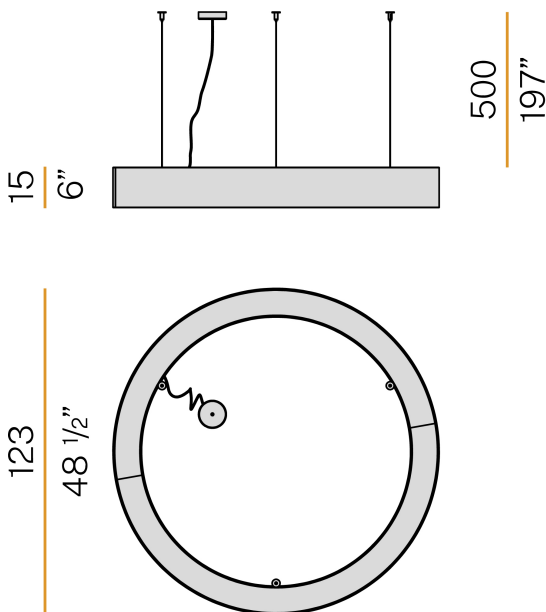

### Polar diagram

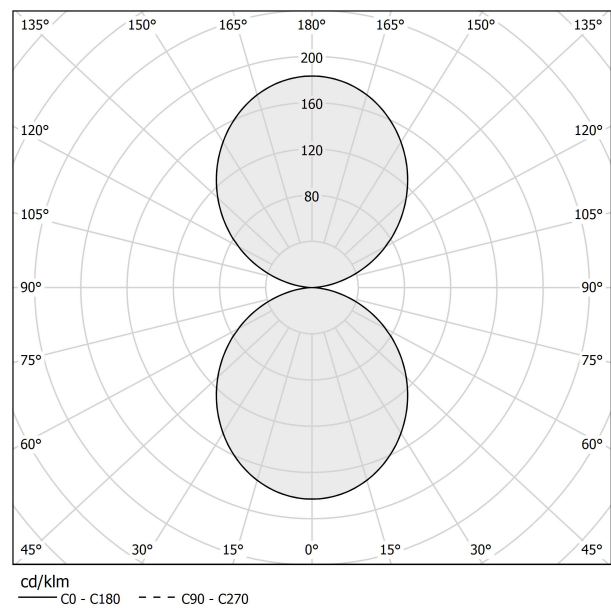

# PANZERI

## Golden Ring

### Accessories / power supply and fixing

---

M8101-3

Canopy for power supply and to join 3 steel cables.

