

# PANZERI

## Golden Ring

220-240V AC dimmable (DALI/Push DIM)

L08121.300.0402




### Data sheet

|                            |                          |
|----------------------------|--------------------------|
| CODE                       | L08121.300.0402          |
| SYSTEM POWER CONSUMPTION   | 370W                     |
| EFFICACY                   | 70.72lm/W                |
| LIGHT SOURCE               | LED                      |
| LIGHT SOURCE LIFETIME      | L80 (B20) 80.000h        |
| COLOUR TEMPERATURE         | 3000K Ra>90              |
| LIGHT DISTRIBUTION         | diffused                 |
| POWER SUPPLY               | 220-240V AC              |
| FREQUENCY                  | 50/60Hz                  |
| ELECTRICAL CONFIGURATION   | dimmable (DALI/Push DIM) |
| DRIVER                     | integrated included      |
| NOMINAL LUMINOUS FLUX      | 52387lm                  |
| LUMEN OUTPUT               | 26166lm                  |
| EFFICIENCY                 | 49.9%                    |
| WEIGHT                     | 41,48 Kg                 |
| PROTECTION DEGREE          | IP40                     |
| COLOUR TOLLERANCES         | SDCM 3                   |
| GLOW WIRE TEST PERFORMANCE | 850°                     |
| PACKING DIMENSIONS         | 312,0 x 40,0 x 180,0 cm  |




Suspension lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in polyacrylic paint. Aluminium dissipation plates. Aluminium and pickled sheet metal covers in white or black polyacrylic paint, or with gold leaf coating. Diffusers in modelled polycarbonate with opaline finish. Suspension kit with griplocks and 5m (196,9") long steel cables. 5m (196,9") long power cable in transparent PVC. Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white or black polyacrylic paint, or with gold leaf coating.

### Technical drawing

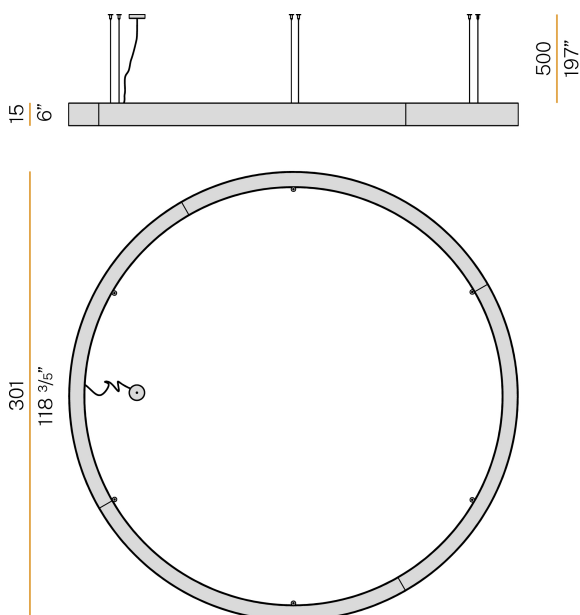

### Polar diagram

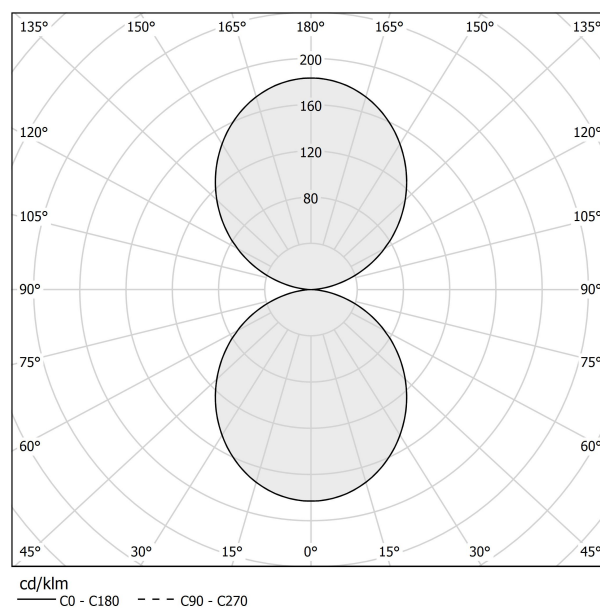

# PANZERI

## Golden Ring

### Accessories / power supply and fixing

---

M8121-6

Canopy for power supply and to join 6 steel cables.

