

432 Ways

220-240V AC dimmable (DALI/Push DIM)
L12729.006.0502

 textured natural terracotta




Data sheet

CODE	L12729.006.0502
SYSTEM POWER CONSUMPTION	6,7W
EFFICACY	125.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L90 (B10) 50.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
BEAM ANGLE	29°
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	858lm
LUMEN OUTPUT	753lm
EFFICIENCY	87.8%
WEIGHT	0,31 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	24,0 x 12,0 x 13,0 cm



Technical drawing

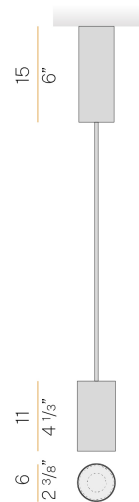

Polar diagram