


Adamas

220-240V AC dimmable (DALI/Push DIM)  
L18419.033.0502




Data sheet

|                          |                          |
|--------------------------|--------------------------|
| CODE                     | L18419.033.0502          |
| SYSTEM POWER CONSUMPTION | 9W                       |
| EFFICACY                 | 69.33lm/W                |
| LIGHT SOURCE             | LED                      |
| LIGHT SOURCE LIFETIME    | L70 (B50) 60.000h        |
| COLOUR TEMPERATURE       | 2700K Ra>90              |
| LIGHT DISTRIBUTION       | diffused                 |
| POWER SUPPLY             | 220-240V AC              |
| FREQUENCY                | 50/60Hz                  |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER                   | integrated included      |
| NOMINAL LUMINOUS FLUX    | 1344lm                   |
| LUMEN OUTPUT             | 624lm                    |
| EFFICIENCY               | 46.4%                    |
| WEIGHT                   | 4,50 Kg                  |
| PROTECTION DEGREE        | IP20                     |
| COLOUR TOLLERANCES       | SDCM 3                   |
| PACKING DIMENSIONS       | 0,0 x 0,0 x 0,0 cm       |



Suspension lighting fixture for interiors, with direct light emission.  
Aluminium frame with polyacrylic paint finish in mat black or mat brass.  
Diffuser screen in acrylic material with satin finish.  
Handmade and hand-ground blown glass in pink colour.  
Steel closing plate with polyacrylic paint.  
Transparent PVC coaxial suspension and power cable 3m (118.1") long.  
Feeding canopy with ceiling mounting bracket in pickled sheet metal and extruded aluminium housing with polyacrylic paint in mat black or mat brass finish.  
DALI / Push Dim driver integrated in the canopy.

Technical drawing

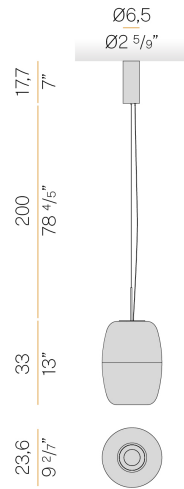

Polar diagram