PANZERI

# Brooklyn Round

220-240V AC dimmable (DALI/Push DIM)
L23119.360.0402

brushed brass

DIRECT LIGHT

## Data sheet

| | |
|---|---|
| CODE | L23119.360.0402 |
| SYSTEM POWER CONSUMPTION | 55W |
| EFFICACY | 53.91lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L80 (B20) 80.000h |
| COLOUR TEMPERATURE | 3000K Ra>90 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 6840lm |
| LUMEN OUTPUT | 2965lm |
| EFFICIENCY | 43.3% |
| WEIGHT | 3,24 Kg |
| PROTECTION DEGREE | IP40 |
| COLOUR TOLLERANCES | SDCM 3 |
| GLOW WIRE TEST PERFORMANCE | 850° |
| PACKING DIMENSIONS | 107,0 x 107,0 x 11,0 cm |

Suspension lighting fixture for interiors, with direct light emission.
Bended extruded aluminium structure in white, black or mat brass polyacrylic paint.
Extruded polycarbonate diffuser with opaline finish.
Suspension kit with griplocks and 2m (78,7") long steel cables.
2,2m (86,6") long power cable in transparent PVC.
Power canopy with pickled sheet metal ceiling bracket and covering in white, black or mat brass polyacrylic paint.

## Technical drawing

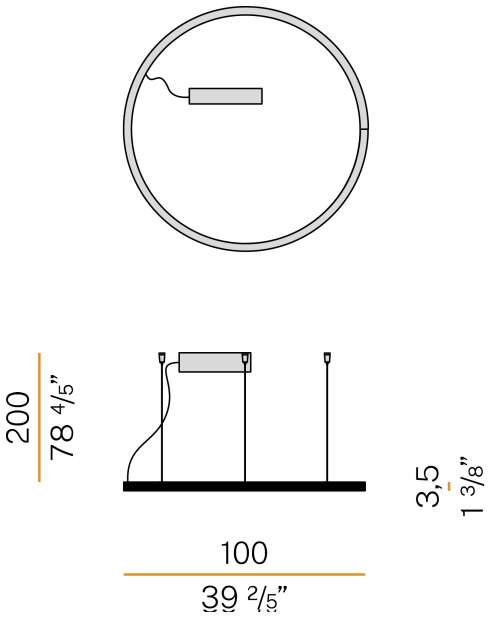


## Polar diagram

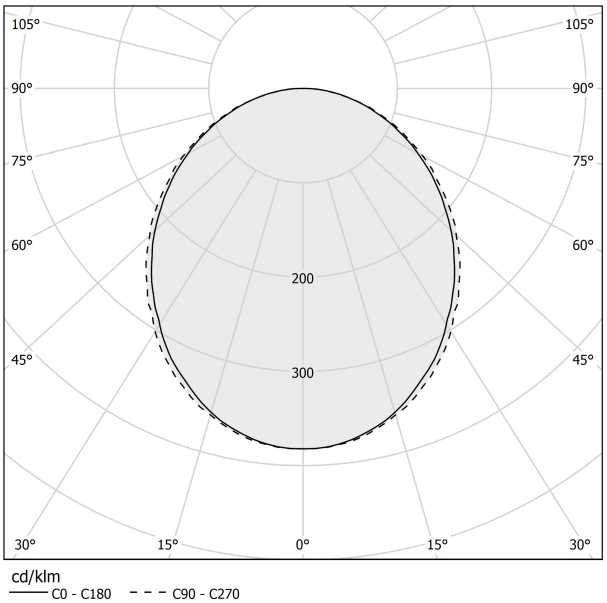

PANZERI

# Brooklyn Round

## Accessories / power supply and fixing

XM23119.538.0099

Canopy for power supply with 8 outputs and to join 7 steel cables, for up to 8 Brooklyn Round models maximum.



PANZERI

# Brooklyn Round

## Accessories / fixing

XM231/23219L

Plate for multiple suspensions.