

# PANZERI

## Brooklyn Line

220-240V AC dimmable (DALI/Push DIM)


L23301.200.0402

● white



### Data sheet

CODE	L23301.200.0402
SYSTEM POWER CONSUMPTION	39W
EFFICACY	58.56lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4560lm
LUMEN OUTPUT	2284lm
EFFICIENCY	50.1%
WEIGHT	3,61 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm

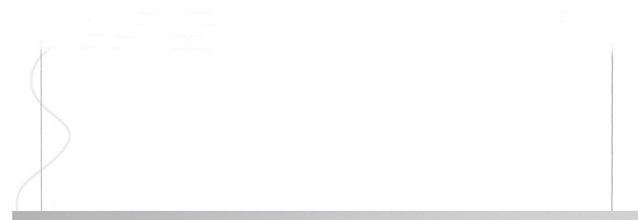

Suspension lighting fixture for interiors, with direct light emission.  
Extruded aluminium structure in RAL 9003 white powder paint.  
Extruded aluminium reflector in powder paint.  
Extruded polycarbonate diffuser with opaline finish.  
Aluminium end caps in polyacrylic paint.  
Suspension kit with griplocks and 2m (78,7") long steel cables.  
2,2m (86,6") long power cable in transparent PVC.  
Power canopy with pickled sheet metal ceiling bracket and covering in white polyacrylic paint.

### Technical drawing

### Polar diagram

