

# PANZERI

## Brooklyn Line

220-240V AC dimmable (DALI/Push DIM)


L23301.200.0402

● white



### Data sheet

|                            |                          |
|----------------------------|--------------------------|
| CODE                       | L23301.200.0402          |
| SYSTEM POWER CONSUMPTION   | 39W                      |
| EFFICACY                   | 58.56lm/W                |
| LIGHT SOURCE               | LED                      |
| LIGHT SOURCE LIFETIME      | L80 (B20) 80.000h        |
| COLOUR TEMPERATURE         | 3000K Ra>90              |
| LIGHT DISTRIBUTION         | diffused                 |
| POWER SUPPLY               | 220-240V AC              |
| FREQUENCY                  | 50/60Hz                  |
| ELECTRICAL CONFIGURATION   | dimmable (DALI/Push DIM) |
| DRIVER                     | integrated included      |
| NOMINAL LUMINOUS FLUX      | 4560lm                   |
| LUMEN OUTPUT               | 2284lm                   |
| EFFICIENCY                 | 50.1%                    |
| WEIGHT                     | 3,61 Kg                  |
| PROTECTION DEGREE          | IP20                     |
| COLOUR TOLLERANCES         | SDCM 3                   |
| GLOW WIRE TEST PERFORMANCE | 850°                     |
| PACKING DIMENSIONS         | 0,0 x 0,0 x 0,0 cm       |

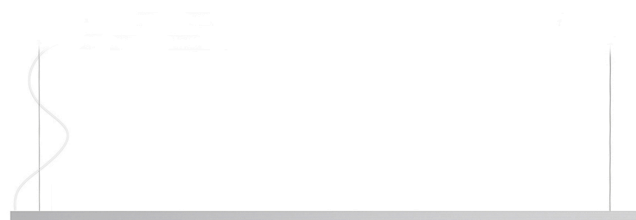

Suspension lighting fixture for interiors, with direct light emission.  
Extruded aluminium structure in RAL 9003 white powder paint.  
Extruded aluminium reflector in powder paint.  
Extruded polycarbonate diffuser with opaline finish.  
Aluminium end caps in polyacrylic paint.  
Suspension kit with griplocks and 2m (78,7") long steel cables.  
2,2m (86,6") long power cable in transparent PVC.  
Power canopy with pickled sheet metal ceiling bracket and covering in white polyacrylic paint.

### Technical drawing

### Polar diagram

