

# PANZERI

## Giano

220-240V AC ON-OFF

L24647.200.0401

 white/prismatic screen




### Data sheet

CODE	L24647.200.0401
SYSTEM POWER CONSUMPTION	72W
EFFICACY	84.1lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	anti-glare
BEAM ANGLE	60° / 87°
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	9120lm
LUMEN OUTPUT	6055lm
EFFICIENCY	66.4%
GLARE RATING	UGR < 19
WEIGHT	6.45 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	14.0 x 224.0 x 14.0 cm



Suspension lighting fixture for interiors, with direct and indirect light emission. Extruded aluminium structure in RAL 9003 white or black powder paint. Extruded polycarbonate diffusers with opaline finish or micro-prismatic. Pickled sheet metal end caps in polyacrylic paint. Suspension kit with griplocks and 2m (78.7") long steel cables. 2,2m (86.6") long power cable in transparent PVC. Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white or black polyacrylic paint. Equipped with wiring for separate switches for direct only, indirect only or direct and indirect light emission.

### Technical drawing

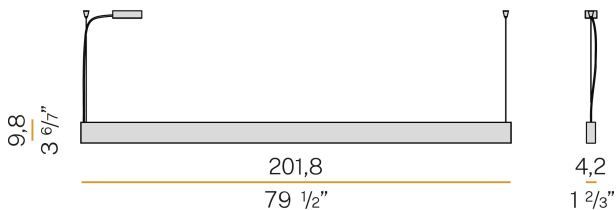

### Polar diagram

