PANZERI

To-be

24V DC
M02501.085.0510

white


DIRECT LIGHT

Data sheet


CODE	M02501.085.0510
SYSTEM POWER CONSUMPTION	2,8W
EFFICACY	90.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	270lm
LUMEN OUTPUT	181lm
EFFICIENCY	67%
WEIGHT	0,64 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	5,0 x 105,0 x 10,0 cm

Multiple suspension lighting fixture for interiors, with direct light emission.
Extruded aluminium structure in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.
Extruded aluminium heat sink.
Modelled polycarbonate diffuser with opaline finish.
Turned brass end cap in polyacrylic paint.
5m (196,9") long suspension and power cable in transparent PVC.
Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing

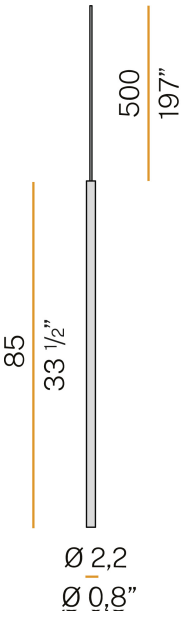

Polar diagram

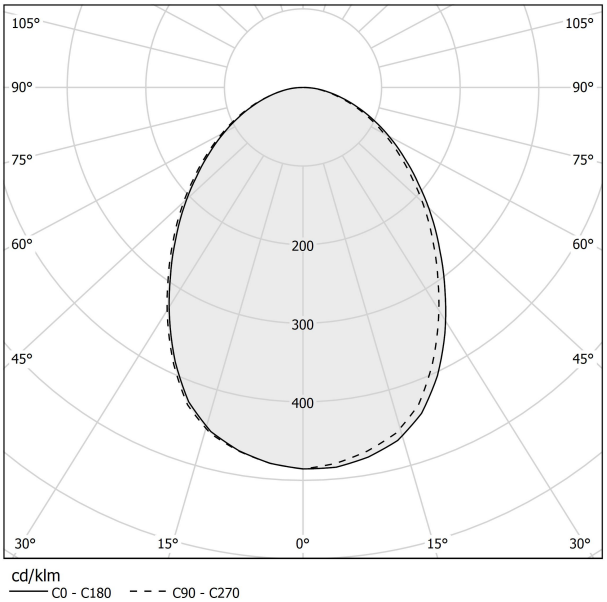


PANZERI

To-be

Accessories / power supply


XM6-20 UNI

LED driver, 4÷20W 250÷700mA.



YDV.024.030.A01

LED driver, 30W 24V DC.




YDV.024.120.A01

LED driver, 120W 24V DC.



YDV.024.180.A01

LED driver, 180W 24V DC.



PANZERI

To-be

Accessories / fixing

M800

Polycarbonate suspension and adjustment device for 6mm diameter electrical cables. Usable for several cables of smaller dimensions.

