



To-be

24V DC
M02506.085.0510




Data sheet


CODE	M02506.085.0510
SYSTEM POWER CONSUMPTION	2,8W
EFFICACY	90.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	270lm
LUMEN OUTPUT	181lm
EFFICIENCY	67%
WEIGHT	0,64 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	5,0 x 105,0 x 10,0 cm



Technical drawing

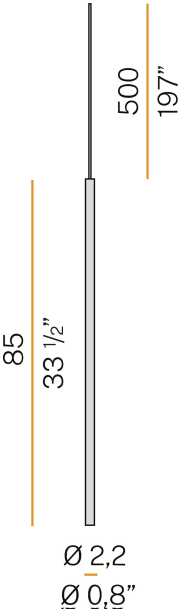


Polar diagram

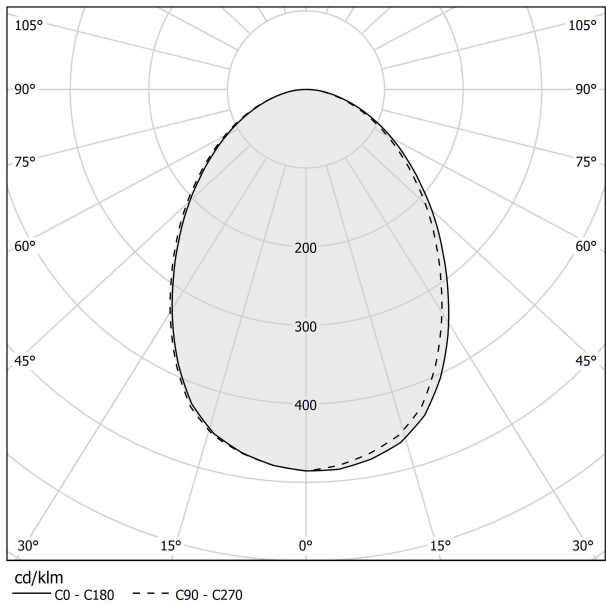

Accessories / power supply


XM100/24 DIM LED driver, 100W 24V DC, DALI/Push DIM dimmable.




XM150/24 DIM LED driver, 150W 24V DC, DALI/Push DIM dimmable.




XM18/24 DIM LED driver, 18W 24V DC, DALI/Push DIM dimmable.




XM35/24 DIM LED driver, 35W 24V DC, DALI/Push DIM dimmable.



XM6-20 UNI LED driver, 4÷20W 250÷700mA.




XM60/24 DIM LED driver, 60W 24V DC, DALI/Push DIM dimmable.




YDV.024.030.A01 LED driver, 30W 24V DC.



YDV.024.120.A01 LED driver, 120W 24V DC.



YDV.024.180.A01 LED driver, 180W 24V DC.



PANZERI

To-be

Accessories / fixing

M800

Polycarbonate hook for suspension.

