

To-be

24V DC 24V
M02517.085.0410

 brushed bronze




Data sheet

CODE	M02517.085.0410
SYSTEM POWER CONSUMPTION	2,8W
EFFICACY	90.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	270lm
LUMEN OUTPUT	181lm
EFFICIENCY	67%
WEIGHT	0,64 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	5,0 x 105,0 x 10,0 cm



Multiple suspension lighting fixture for interiors, with direct light emission.
Extruded aluminium structure in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.
Extruded aluminium heat sink.
Modelled polycarbonate diffuser with opaline finish.
Turned brass end cap in polyacrylic paint.
5m (196,9") long suspension and power cable in transparent PVC.
Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing

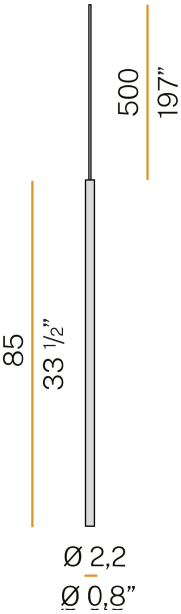

Polar diagram

