


To-be

24V DC
M02521.085.0510




Data sheet

CODE	M02521.085.0510
SYSTEM POWER CONSUMPTION	2,8W
EFFICACY	90.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	270lm
LUMEN OUTPUT	181lm
EFFICIENCY	67%
WEIGHT	0,64 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	5,0 x 105,0 x 10,0 cm




Multiple suspension lighting fixture for interiors, with direct light emission.
Extruded aluminium structure in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.
Extruded aluminium heat sink.
Modelled polycarbonate diffuser with opaline finish.
Turned brass end cap in polyacrylic paint.
5m (196,9") long suspension and power cable in transparent PVC.
Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing

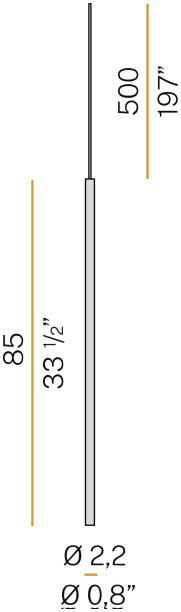


Polar diagram

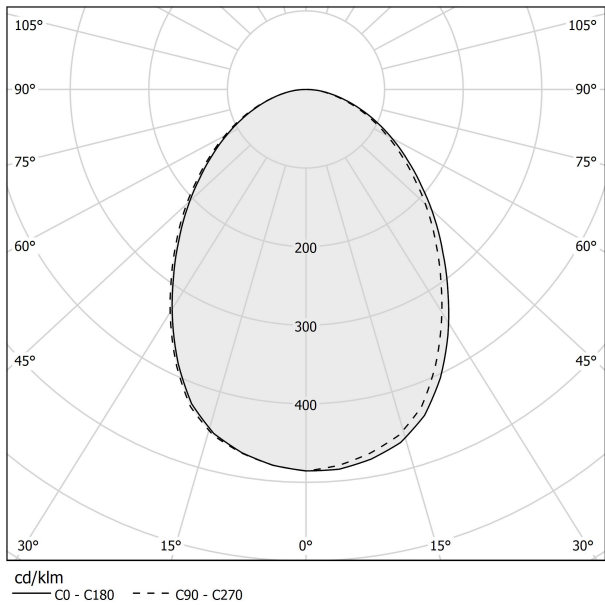


Accessories / power supply


XM100/24 DIM LED driver, 100W 24V DC, DALI/Push DIM dimmable.




XM150/24 DIM LED driver, 150W 24V DC, DALI/Push DIM dimmable.




XM18/24 DIM LED driver, 18W 24V DC, DALI/Push DIM dimmable.




XM35/24 DIM LED driver, 35W 24V DC, DALI/Push DIM dimmable.



XM6-20 UNI LED driver, 4÷20W 250÷700mA.




XM60/24 DIM LED driver, 60W 24V DC, DALI/Push DIM dimmable.




YDV.024.030.A01 LED driver, 30W 24V DC.



YDV.024.120.A01 LED driver, 120W 24V DC.



YDV.024.180.A01 LED driver, 180W 24V DC.



PANZERI

To-be

Accessories / fixing

M800

Polycarbonate hook for suspension.

