

To-be

24V DC
M02601.065.0510

white




Data sheet

| | |
|--------------------------|-----------------------|
| CODE | M02601.065.0510 |
| SYSTEM POWER CONSUMPTION | 5,3W |
| EFFICACY | 72,6lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L70 (B50) 60.000h |
| COLOUR TEMPERATURE | 2700K Ra>90 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 24V DC |
| DRIVER | remote not included |
| NOMINAL LUMINOUS FLUX | 550lm |
| LUMEN OUTPUT | 363lm |
| EFFICIENCY | 66% |
| WEIGHT | 0,45 Kg |
| PROTECTION DEGREE | IP40 |
| COLOUR TOLLERANCES | SDCM 3 |
| PACKING DIMENSIONS | 5,0 x 105,0 x 10,0 cm |




Multiple suspension lighting fixture for interiors, with direct light emission.
Extruded aluminium structure in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.
Extruded aluminium heat sink.
Modelled polycarbonate diffuser with opaline finish.
Turned brass end cap in polyacrylic paint.
2m (78,7") long suspension and power cable in transparent PVC.
Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing

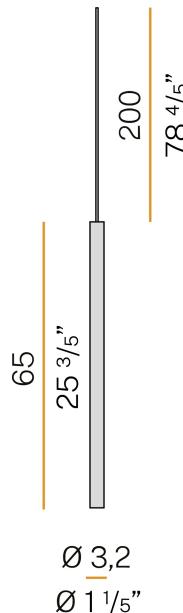

Polar diagram

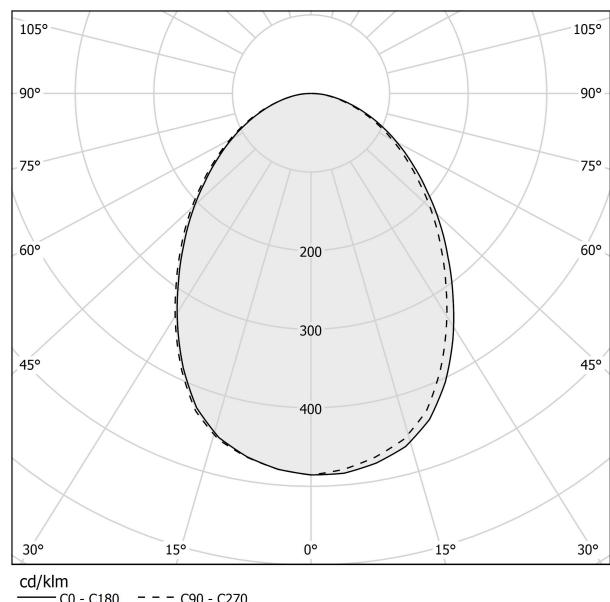

PANZERI

To-be

Accessories / power supply

XM6-20 UNI

LED driver, 4÷20W 250÷700mA.

22 mm
7/8"



52 mm
2"

118 mm
4 2/3"

YDV.024.030.A01

LED driver, 30W 24V DC.

17 mm
5/8"

20 mm
1 1/8"

261 mm
10 1/8"

YDV.024.120.A01

LED driver, 120W 24V DC.

26.5 mm
1 1/8"

29 mm
1 1/8"

269 mm
10 1/8"

YDV.024.180.A01

LED driver, 180W 24V DC.

32.5 mm
1 1/8"

35 mm
1 3/8"

329 mm
12 1/8"



To-be

Accessories / fixing

M800

Polycarbonate suspension and adjustment device for 6mm diameter electrical cables. Usable for several cables of smaller dimensions.

