

Bella

24V DC
M05217.011.0510




Data sheet

CODE	M05217.011.0510
SYSTEM POWER CONSUMPTION	4,5W
EFFICACY	97lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 70.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	460lm
LUMEN OUTPUT	388lm
EFFICIENCY	84.3%
WEIGHT	0,22 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	13,0 x 24,0 x 12,0 cm




Multiple suspension lighting fixture for interiors, with direct light emission.
Die-cast aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.
Modelled acrylic diffuser with mat finish.
Aluminium closing disk in polyacrylic paint.
Suspension kit with rod in brass tube in polyacrylic paint.
3m (118,1") long suspension and coaxial power cable in transparent PVC.
Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing

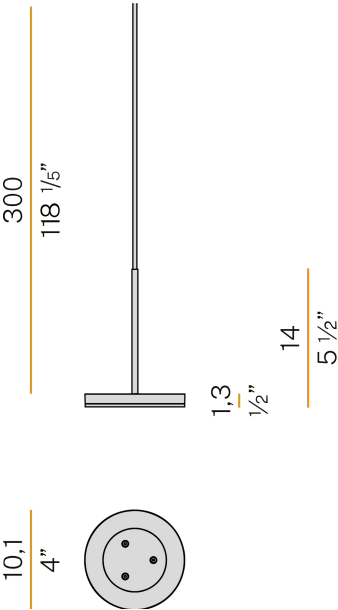


Polar diagram

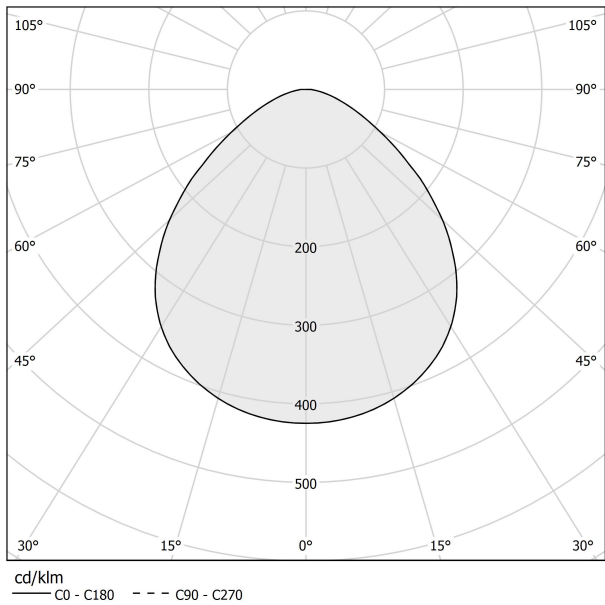

Accessories / power supply


XM100/24 DIM LED driver, 100W 24V DC, DALI/Push DIM dimmable.




XM150/24 DIM LED driver, 150W 24V DC, DALI/Push DIM dimmable.




XM18/24 DIM LED driver, 18W 24V DC, DALI/Push DIM dimmable.




XM35/24 DIM LED driver, 35W 24V DC, DALI/Push DIM dimmable.




XM6-20 UNI LED driver, 4÷20W 250÷700mA.




XM60/24 DIM LED driver, 60W 24V DC, DALI/Push DIM dimmable.




YDV.024.030.A01 LED driver, 30W 24V DC.



YDV.024.120.A01 LED driver, 120W 24V DC.



YDV.024.180.A01 LED driver, 180W 24V DC.



PANZERI

Bella

Accessories / diffusion

YPL05207.015

Ivory pleated fabric lampshade, simple snap installation.

