


PANZERI

Bella

24V DC
M05319.011.0510

 mat brass




Data sheet

CODE	M05319.011.0510
SYSTEM POWER CONSUMPTION	4,5W
EFFICACY	97lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 70.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	460lm
LUMEN OUTPUT	388lm
EFFICIENCY	84.3%
WEIGHT	0,22 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	13,0 x 24,0 x 12,0 cm



Multiple suspension lighting fixture for interiors, with indirect light emission.
Die-cast aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.
Modelled acrylic diffuser with mat finish.
Pickled sheet metal closing disk in polyacrylic paint.
Suspension kit with rod in brass tube in polyacrylic paint.
3m (118,1") long suspension and coaxial power cable in transparent PVC.
Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing

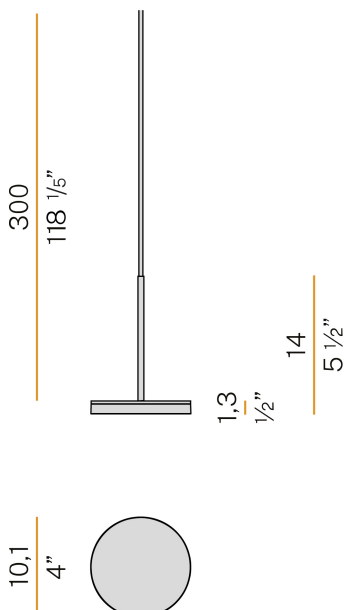

PANZERI

Bella

Accessories / power supply


XM100/24 DIM

LED driver, 100W 24V DC, DALI/Push DIM dimmable.




XM150/24 DIM

LED driver, 150W 24V DC, DALI/Push DIM dimmable.




XM18/24 DIM

LED driver, 18W 24V DC, DALI/Push DIM dimmable.




XM35/24 DIM

LED driver, 35W 24V DC, DALI/Push DIM dimmable.



XM6-20 UNI

LED driver, 4x20W 250±700mA.



XM60/24 DIM

LED driver, 60W 24V DC, DALI/Push DIM dimmable.




YDV.024.030.A01

LED driver, 30W 24V DC.



YDV.024.120.A01

LED driver, 120W 24V DC.



YDV.024.180.A01

LED driver, 180W 24V DC.

