

PANZERI

Candle

24V DC
M09501.000.0410

white




Data sheet

CODE	M09501.000.0410
SYSTEM POWER CONSUMPTION	2,8W
EFFICACY	119lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	286lm
LUMEN OUTPUT	238lm
EFFICIENCY	83,2%
WEIGHT	0,37 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	13,0 x 65,0 x 13,0 cm




Multiple suspension lighting fixture for interiors, with direct and indirect light emission. Turned steel structure in white polyacrylic paint. Turned aluminium heat sink. Diffuser in partially mat borosilicate glass tube. 3m (118,1") long suspension and power cable in transparent PVC. Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing

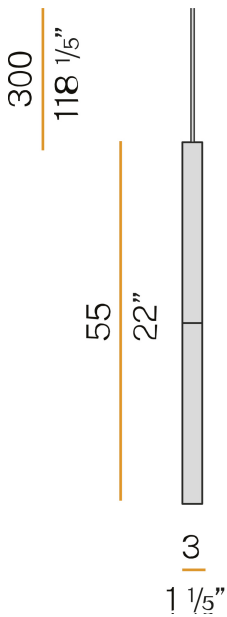

Polar diagram

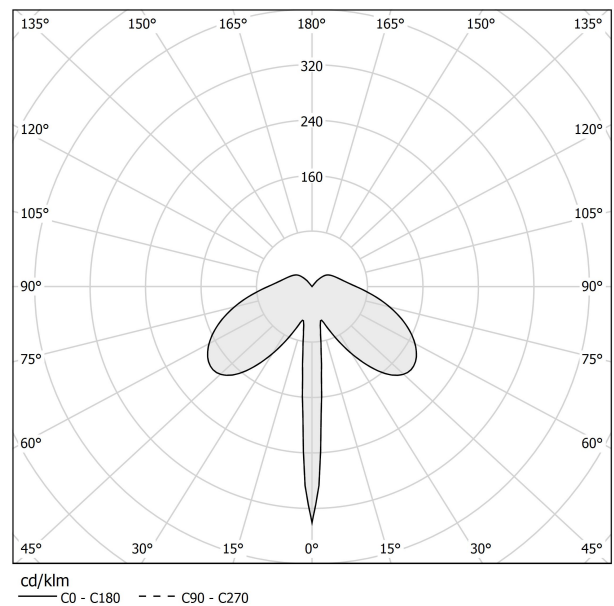

PANZERI

Candle

Accessories / power supply


XM100/24 DIM

LED driver, 100W 24V DC, DALI/Push DIM dimmable.




XM18/24 DIM

LED driver, 18W 24V DC, DALI/Push DIM dimmable.




XM35/24 DIM

LED driver, 35W 24V DC, DALI/Push DIM dimmable.




XM6-20 UNI

LED driver, 4x20W 250÷700mA.




XM60/24 DIM

LED driver, 60W 24V DC, DALI/Push DIM dimmable.



YDV.024.030.A01

LED driver, 30W 24V DC.



YDV.024.120.A01

LED driver, 120W 24V DC.

