


PANZERI

Zero Round


24V DC
M10319.125.0410

 mat brass



Data sheet

CODE	M10319.125.0410
SYSTEM POWER CONSUMPTION	62W
EFFICACY	82.24lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	7088lm
LUMEN OUTPUT	5099lm
EFFICIENCY	71.9%
WEIGHT	1,50 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	132,0 x 132,0 x 9,0 cm



Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.

Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.


Extruded polycarbonate diffuser with opaline finish.

Suspension kit with griplocks and 5m (196,9") long steel cables.


5m (196,9") long power cable in transparent PVC.

Provided without power canopy.

Technical drawing

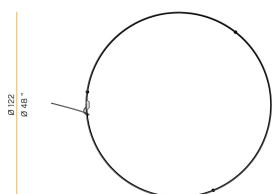

Polar diagram

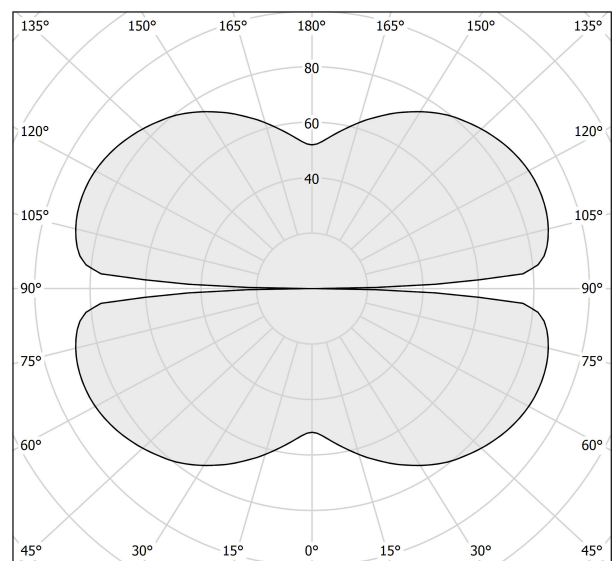

cd/klm
— C0 - C180 - - - C90 - C270

PANZERI

Zero Round

Accessories / power supply

XM10319.521.0002

Canopy for power supply of 1 Zero Round 125 - Zero Round 150 - Zero Round 200 model, with DALI/Push DIM driver.

