

Murané

24V DC 24V  
M11305.015.0510

champagne




Data sheet

|                          |                     |
|--------------------------|---------------------|
| CODE                     | M11305.015.0510     |
| SYSTEM POWER CONSUMPTION | 2,7W                |
| EFFICACY                 | 83.5lm/W            |
| LIGHT SOURCE             | LED                 |
| COLOUR TEMPERATURE       | 2700K Ra>90         |
| LIGHT DISTRIBUTION       | diffused            |
| POWER SUPPLY             | 24V DC              |
| ELECTRICAL CONFIGURATION | 24V                 |
| DRIVER                   | remote not included |
| LUMEN OUTPUT             | 167lm               |
| WEIGHT                   | 0,64 Kg             |
| PROTECTION DEGREE        | IP20                |
| COLOUR TOLLERANCES       | SDCM 3              |
| PACKING DIMENSIONS       | 0,0 x 0,0 x 0,0 cm  |



Multiple suspension lighting fixture for interiors, with direct and indirect light emission. Turned brass wiring support. Diffuser in blown glass with caramel colour. Turned aluminium closing disk in champagne polyacrylic paint. 5m (196,9") long suspension and coaxial power cable in transparent PVC. Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing

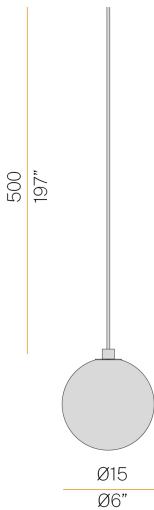

Polar diagram

