

Murané

24V DC 24V
M11305.018.0510

champagne




Data sheet

CODE	M11305.018.0510
SYSTEM POWER CONSUMPTION	2,7W
EFFICACY	83.5lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
LUMEN OUTPUT	167lm
WEIGHT	0,92 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Multiple suspension lighting fixture for interiors, with direct and indirect light emission. Turned brass wiring support. Diffuser in blown glass with caramel colour. Turned aluminium closing disk in champagne polyacrylic paint. 5m (196,9") long suspension and coaxial power cable in transparent PVC. Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing

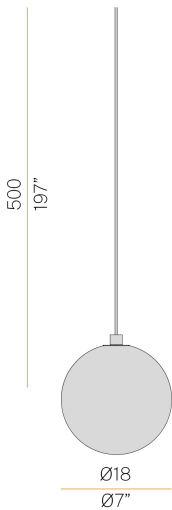

Polar diagram

