

Murané R

24V DC 24V
M19605.150.0510

● brushed champagne




Data sheet

CODE	M19605.150.0510
SYSTEM POWER CONSUMPTION	32W
EFFICACY	55.16lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	2004lm
LUMEN OUTPUT	1765lm
EFFICIENCY	88.1%
WEIGHT	8,62 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.
Bended extruded aluminium structure in champagne polyacrylic paint.
Pickled sheet metal cover in polyacrylic paint.
Turned brass wiring supports.
Diffusers in blown glass with forest green colour.
Turned aluminium closing disks in polyacrylic paint.
Provided without suspension kit, power cable and canopy.

Technical drawing

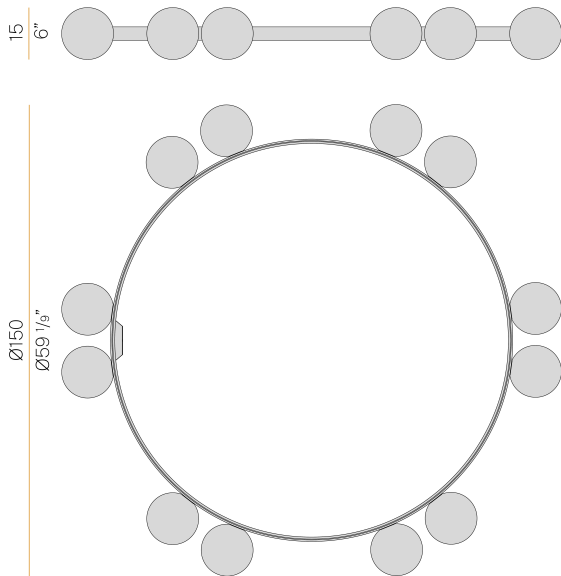

Polar diagram

Murané R

Accessories / power supply and fixing

YFA11600.010

Multiple power supply and suspension kit with 20cm (7,9") long power cable and 8cm (3,1") long steel cables.




YFA11600.025

Multiple power supply and suspension kit with 30cm (11,8") long power cable and 27cm (10,6") long steel cables.




YFR11605.075.A02

Power supply and suspension kit with champagne or mat black canopy, 75W DALI/Push DIM dimmable driver, 5m (196,9") long power cable, griplocks and 5m (196,9") long steel cables. Canopy for power supply up to 1 M116__080.0410 or 1 M116__110.0410 model.



YFR11605.180.A02

Power supply and suspension kit with champagne or mat black canopy, 180W DALI/Push DIM dimmable driver, 5m (196,9") long power cable, griplocks and 5m (196,9") long steel cables. Canopy for power supply up to 3 M116__080.0410 or 2 M116__110.0410 models maximum.



Murané R

Accessories / fixing

YFS11601.500

Suspension kit of 3 steel cables 5m (196.9") long, griplocks and 5m (196.9") long power cable, for installation of M106 or M116 model.

