




Hilow

24V DC  
P02806.115.0510




Data sheet

|                          |                        |
|--------------------------|------------------------|
| CODE                     | P02806.115.0510        |
| SYSTEM POWER CONSUMPTION | 72W                    |
| EFFICACY                 | 68.0lm/W               |
| LIGHT SOURCE             | LED                    |
| LIGHT SOURCE LIFETIME    | L70 (B10) 60.000h      |
| COLOUR TEMPERATURE       | 2700K Ra>90            |
| LIGHT DISTRIBUTION       | diffused               |
| POWER SUPPLY             | 24V DC                 |
| DRIVER                   | remote not included    |
| NOMINAL LUMINOUS FLUX    | 8820lm                 |
| LUMEN OUTPUT             | 4897lm                 |
| EFFICIENCY               | 55.5%                  |
| WEIGHT                   | 2,15 Kg                |
| PROTECTION DEGREE        | IP20                   |
| COLOUR TOLLERANCES       | SDCM 3                 |
| PACKING DIMENSIONS       | 87,0 x 118,0 x 14,0 cm |

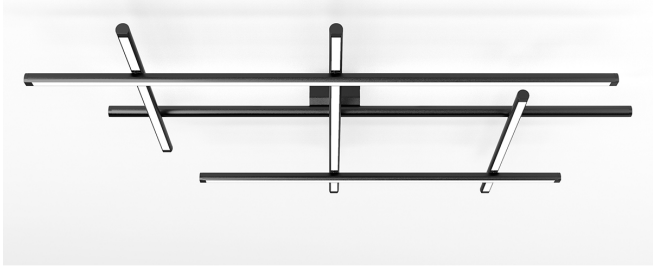


Ceiling lighting fixture for interiors, with direct and indirect light emission.  
Pickled sheet metal ceiling bracket in polyacrylic paint.  
Pickled sheet metal wall plate in polyacrylic paint.  
Extruded aluminium structure in white, mat black, bronze, mat brass or titanium polyacrylic paint.  
Joints in turned brass and die-cast aluminium in polyacrylic paint.  
Die-cast aluminium end caps in polyacrylic paint.  
Extruded polycarbonate diffusers with opaline finish.

Technical drawing

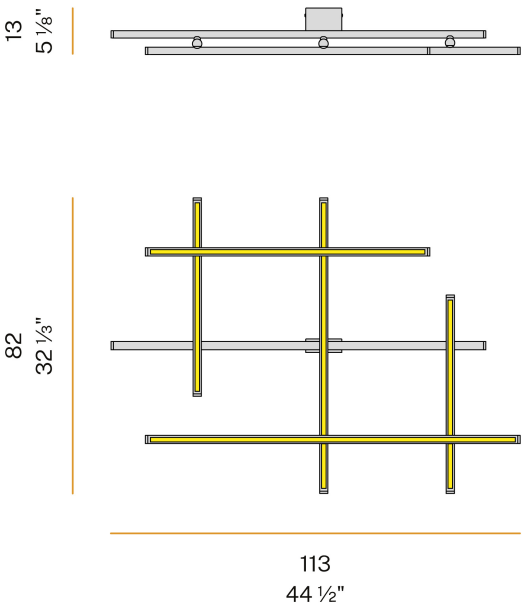


Polar diagram

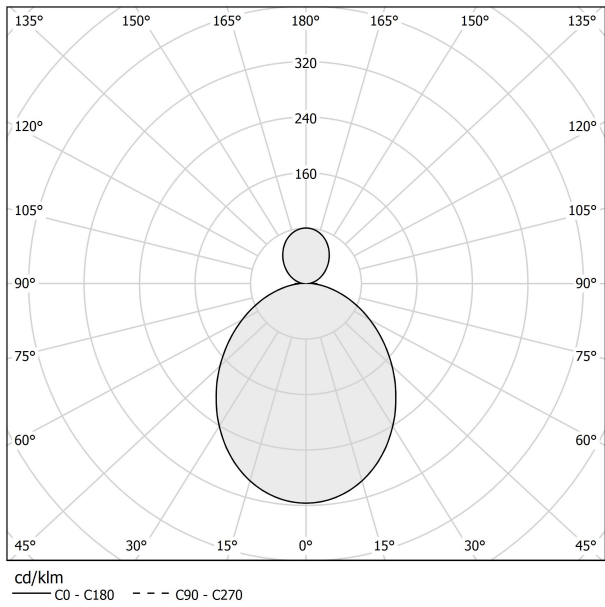

Accessories / power supply

XM100/24 DIM LED driver, 100W 24V DC, DALI/Push DIM dimmable.



YDV.024.120.A01 LED driver, 120W 24V DC.

