

# PANZERI

## One

220-240V AC ON-OFF  
P03717.000.0401




### Data sheet

|                          |                       |
|--------------------------|-----------------------|
| CODE                     | P03717.000.0401       |
| SYSTEM POWER CONSUMPTION | 15W                   |
| EFFICACY                 | 68.13lm/W             |
| LIGHT SOURCE             | LED                   |
| LIGHT SOURCE LIFETIME    | L90 (B10) 50.000h     |
| COLOUR TEMPERATURE       | 3000K Ra>90           |
| LIGHT DISTRIBUTION       | diffused              |
| POWER SUPPLY             | 220-240V AC           |
| FREQUENCY                | 50/60Hz               |
| ELECTRICAL CONFIGURATION | ON-OFF                |
| DRIVER                   | integrated included   |
| NOMINAL LUMINOUS FLUX    | 1611lm                |
| LUMEN OUTPUT             | 1022lm                |
| EFFICIENCY               | 63.4%                 |
| WEIGHT                   | 0,77 Kg               |
| PROTECTION DEGREE        | IP40                  |
| COLOUR TOLLERANCES       | SDCM 3                |
| PACKING DIMENSIONS       | 23,0 x 31,0 x 13,0 cm |



Ceiling lighting fixture for interiors, with direct light emission.  
Turned pickled sheet metal ceiling bracket in white, black, bronze, mat brass or gold polyacrylic paint.  
Extruded aluminium structure in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.  
Aluminium dissipation plate.  
Flat frosted glass diffuser.  
Turned pickled sheet metal frame in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.

### Technical drawing

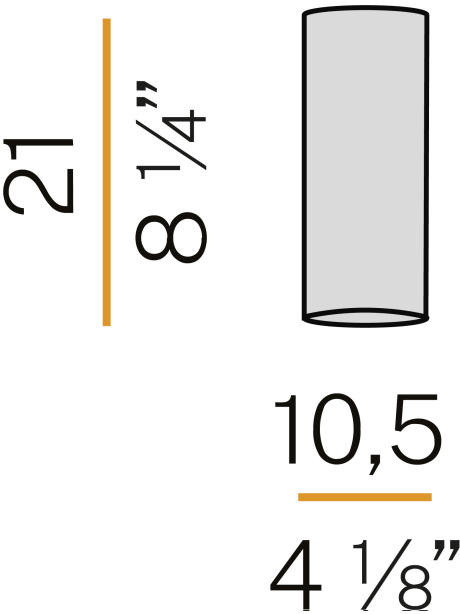

### Polar diagram

