

# PANZERI

## Côte

220-240V AC dimmable (phase cut)

P06101.050.0404

 white




### Data sheet

CODE	P06101.050.0404
SYSTEM POWER CONSUMPTION	22,5W
EFFICACY	85lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2702lm
LUMEN OUTPUT	1870lm
EFFICIENCY	69.2%
WEIGHT	5,45 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Die-cast aluminium structure in white polyacrylic paint.  
Diffuser screen made of frosted blown glass with matt white or smoke grey finish.  
Pickled sheet metal covering with ceiling fixing bracket in white polyacrylic paint.

### Technical drawing

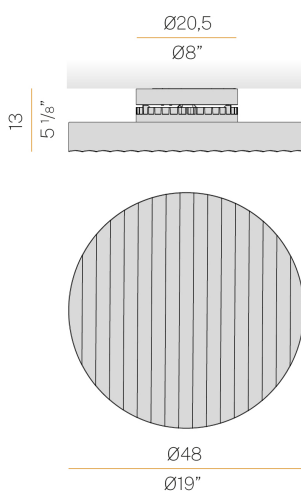

### Application

