

PANZERI

Carmen

220-240V AC ON-OFF
P06402.002.0401




Data sheet

CODE	P06402.002.0401
SYSTEM POWER CONSUMPTION	28,5W
EFFICACY	89.96lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3420lm
LUMEN OUTPUT	2519lm
EFFICIENCY	73.7%
WEIGHT	4,08 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	18,0 x 140,0 x 31,0 cm



Ceiling or wall lighting fixture for interiors, with indirect light emission.
Pickled sheet metal ceiling/wall bracket in polyacrylic paint.
Pickled sheet metal wall plate in polyacrylic paint.
Turned steel joints in polyacrylic paint.
Structure with adjustable arms in pickled sheet metal in white or black polyacrylic paint.
Aluminium dissipation plates in polyacrylic paint.
Modelled polycarbonate screens with transparent finish.

Technical drawing

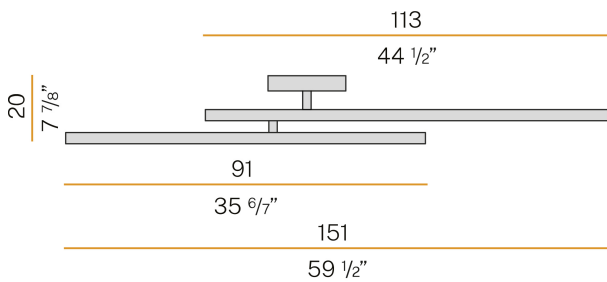

Application



Polar diagram

